

WAAS CH 50300 W12A	APP CRS 122°	Rwy Idg TDZE Apt Elev	6001 74 79
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 12

DELAND MUNI-SIDNEY H TAYLOR FLD (DED)


RNP APCH.

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Daytona Beach Intl altimeter setting. Rwy 12 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received use Daytona Beach Intl altimeter setting increase all DA/MDA 40 feet, increase LNAV/VNAV visibility ½ SM all Cats.

MISSED APPROACH: Climb to 2000 direct CUGAK then on track 139° to OAKIE and hold.

AWOS-3 119.575	DAYTONA APP CON 125.35 322.3	UNICOM 123.075 (CTAF) 0
--------------------------	--	-----------------------------------

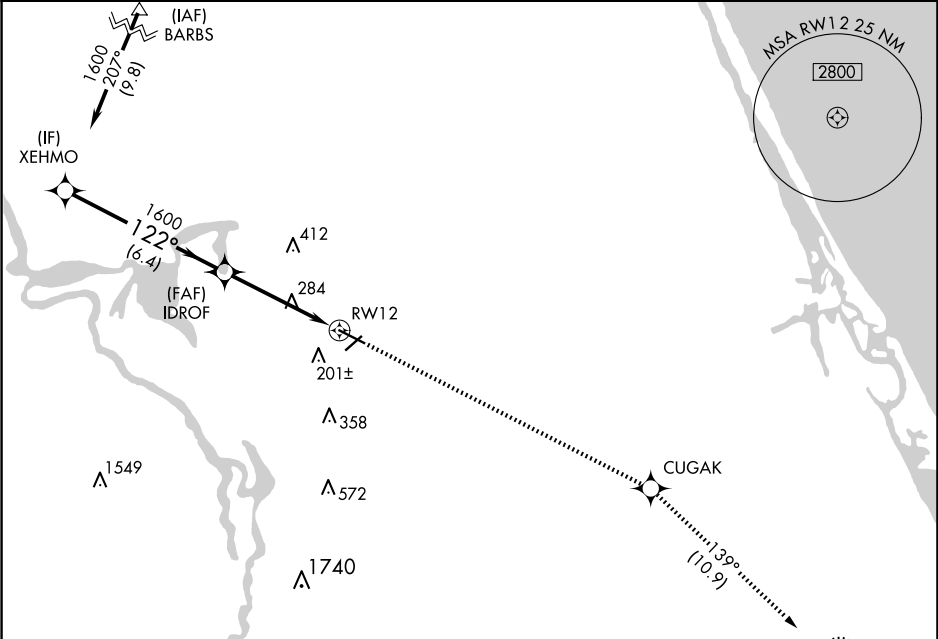

ELEV 79	TDZE 74
----------------	----------------

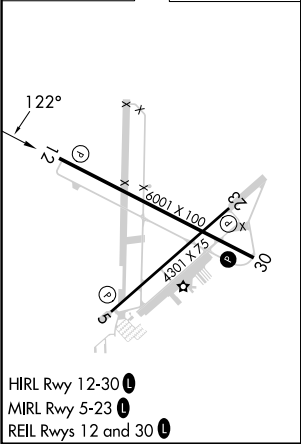

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 51).			
XEHMO 1600 122° IDROF 1600 GP 3.00° TCH 40 6.4 NM 3.1 NM 1.5 NM RWY 12 2000 CUGAK tr 139° OAKIE *1.5 NM to RWY 12 *LNAV only.			
CATEGORY	A	B	C
LPV DA	404-1¼ 330 (400-1¼)		
LNAV/VNAV DA	528-1½ 454 (500-1½)		
LNAV MDA	600-1	526 (600-1)	600-1½ 526 (600-1½)

SE-3, 30 OCT 2025 to 27 NOV 2025

SE-3, 30 OCT 2025 to 27 NOV 2025