

ILS RWY 21L (CAT II)

TRAVIS AFB (KSUU)

LOC I-SUU <u>110.1</u>	APCH CRS 215°	Rwy Idg 10,995 TDZE 58 Arpt Elev 63
----------------------------------	-------------------------	--

[USAF]

RNAV1 - GPS or RADAR required.

RADAR required for CAT E aircraft for full procedure off of SEATO.




ALSF-2





MISSED APPROACH: Climb to 2200 then climbing right turn to 4500 direct SEATO and hold. continue climb in hold to 4500.

ATIS		APP CON		TOWER		GND CON		CLNC DEL	
135.55	292.125	119.9	322.325 (S)	120.75	254.4	121.8	289.4	127.55	335.8
		126.6	281.45 (N)						

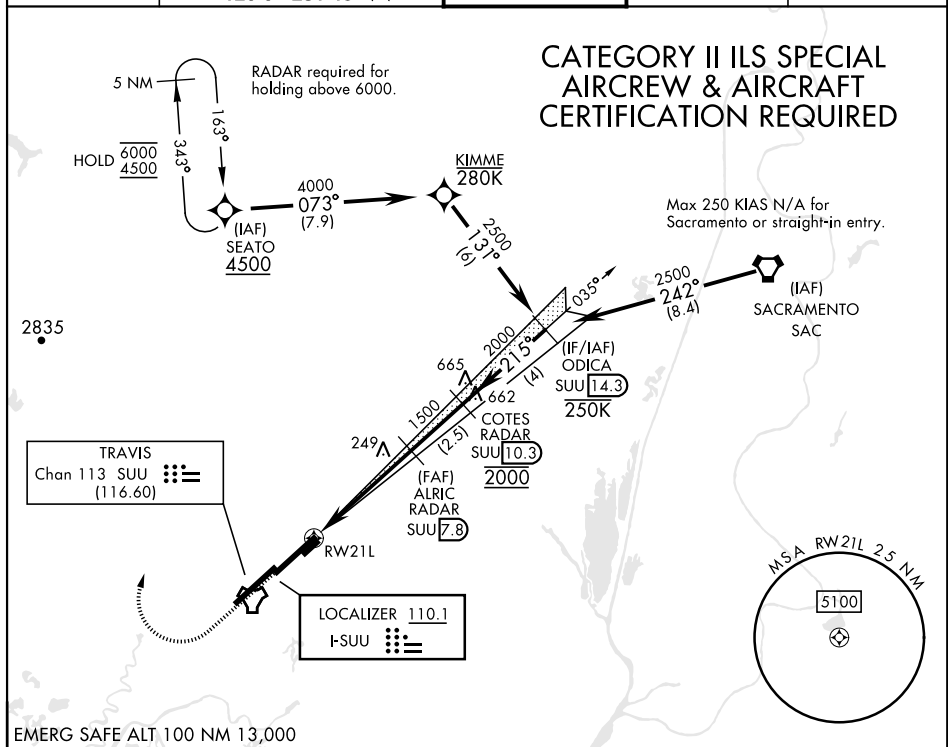

EMERG SAFE ALT 100 NM 13.000

2200 ↑	4500 ↗	SEATO 	VGSI and glidepath not coincident (VGSI Angle 2.80/TCH 75).	ELEV 63	TDZE 58 
-----------	-----------	--	--	---------	--

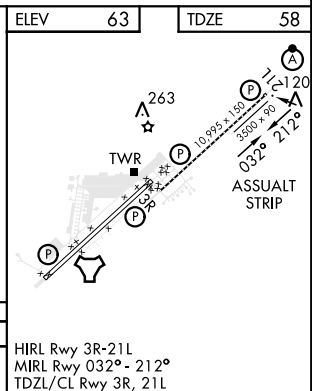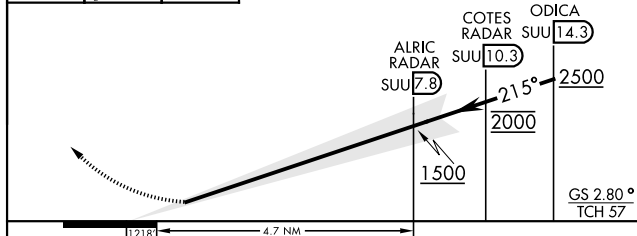

CATEGORY	A	B	C	D	E
S-ILS 21L	RA 83/12 100 DA 158				

FAIRFIELD, CALIFORNIA

38°16'N-121°55'W

TRAVIS AFB (KSUU)

Orig 19MAY22

ILS RWY 21L (CAT II)

SW-2, 30 OCT 2025 to 27 NOV 2025

SW-2, 30 OCT 2025 to 27 NOV 2025