

AUSTIN, TEXAS

AL-502 (FAA)

25051


WAAS CH 78332 W26A	APP CRS 261°	Rwy Idg 6330 TDZE 587 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 26
SAN MARCOS RGNL (HYI)



⚠ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (33°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats, and LNAV Cat C/D/E visibility ½ mile and Circling Cat C/D visibility ¼ mile. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 3000 direct
RAJRY and hold.

ATIS 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
------------------------	---------------------------------------	---	---------------------------	----------------------------	--

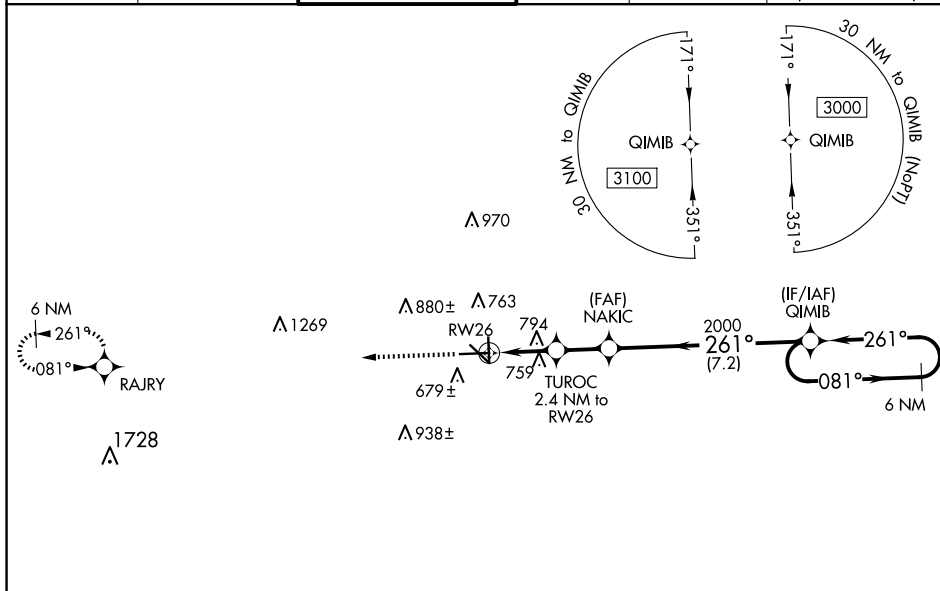

ELEV 595		TDZE 587
----------	--	----------

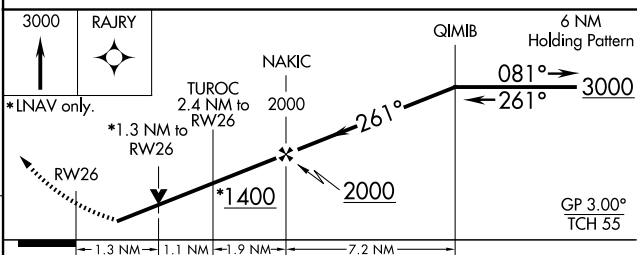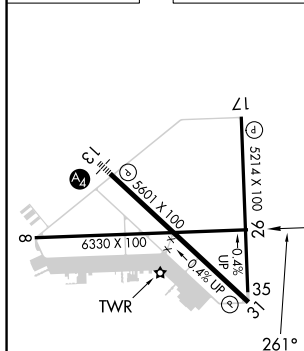

CATEGORY		A	B	C	D	E
LPV	DA	837- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)				
INAV/ VNAV	DA	866- $\frac{7}{8}$ 279 (300- $\frac{7}{8}$)				
INAV	MDA	1060-1	473 (500-1)	1060-1 $\frac{3}{8}$ 473 (500-1 $\frac{3}{8}$)		
 CIRCLING		1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1 $\frac{3}{4}$ 645 (700-1 $\frac{3}{4}$)	1320-2 $\frac{1}{4}$ 725 (800-2 $\frac{1}{4}$)	1340-2 $\frac{3}{4}$ 745 (800-2 $\frac{3}{4}$)

AUSTIN, TEXAS
Orig-B 23JUN16

29°54'N-97°52'W

SAN MARCOS RGNL (HYI)
RNAV (GPS) RWY 26

SC-3, 30 OCT 2025 to 27 NOV 2025