

WAAS CH 41172 W04A	APCH CRS 038°	Rwy ldg TDZE Arpt Elev	10,001 4284 4295
--------------------------	------------------	------------------------------	------------------------


(USAF)

CANNON AFB (KCVS)

▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile. ** When ALS inop increase RVR to 60 vis to 1 1/8 miles. *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile; CAT CDE RVR to 60, vis to 1 1/8 miles.	ALSF-1 	MISSED APPROACH: Climb to 7000 direct FETEP, then track to HEKDI and hold.
--	---	---

ATIS 119.1 269.9	CANNON APP CON 118.425 352.1	TOWER 120.4 270.25	GND CON 121.9 275.8	CLNC DEL 120.2 293.225
---------------------	---------------------------------	-----------------------	------------------------	---------------------------

DME/DME RNP-0.3 NA
For uncompensated Baro-VNAV systems, Procedure NA below 7°C (45°F) or above 54°C (130°F).

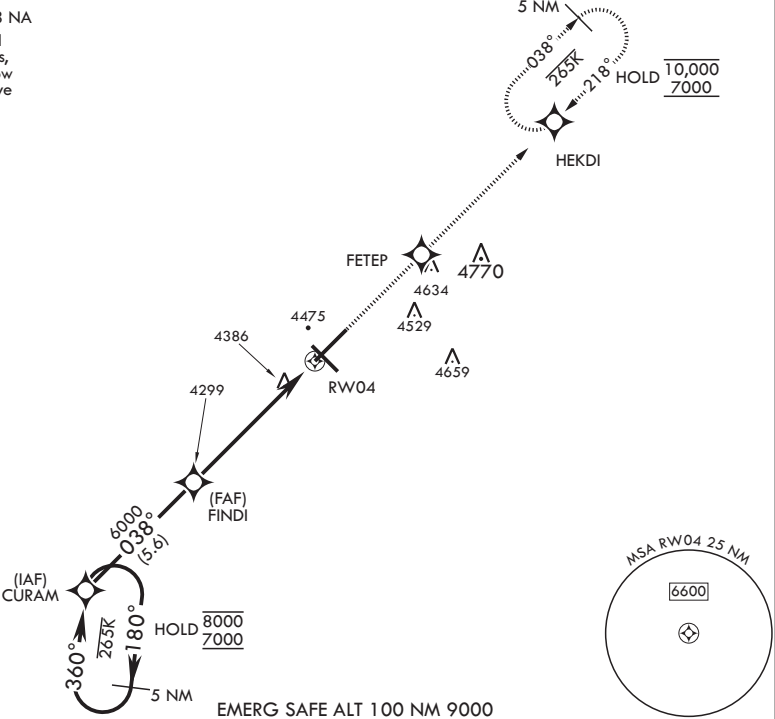

5 NM Holding Pattern	VGSI and RNAV glidepath not coincident (VGSI angle 2.50/TCH 41°).	7000	FETEP	ELEV 4295	TDZE 4284
8000 7000	180°	360°	038°	FINDI	1.4 NM to RW04
GP 2.50° TCH 46	6000	6.3 NM	RW04	BCN	TWR
CATEGORY	A	B	C	D	E
LPV DA*	4484/24	200	(200-1/2)		
LNAV/VNAV DA**	4700/40	416	(500-3/4)		
LNAV MDA***	4700/24 416 (500-1/2)	4700/40 416 (500-3/4)			
CIRCLING	4840-1 545 (600-1)	4840-1 1/2 545 (600-1/2)	4980-2 1/4 685 (700-2/4)	5020-2 1/2 725 (800-2/2)	