

VORTAC SPI	APP CRS	Rwy Ldg	7927
112.7	055°	TDZE	592
Chan 74		Apt Elev	598

VOR RWY 4

ABRAHAM LINCOLN CAPITAL (SPI)

DME required.

⚠ VDP NA when using AAA altimeter setting. When local altimeter setting not received, use AAA altimeter setting; increase all MDAs 60 feet and Circling Cat C/D visibility ¼ SM. For inop ALS, increase S-4 Cat C/D visibility to RVR 5500.



⚠ ASR

MALSR



MISSED APPROACH: Climb to 1500 then climbing left turn to 2500 on heading 325° and on SPI VORTAC R-355 to GROWL/14.7 DME and hold.

ATIS	SAINT LOUIS APP CON ★	SPRINGFIELD TOWER ★	GND CON	UNICOM
127.65 270.1	126.15 323.0	121.3 (CTAF) 0 257.8	121.9 348.6	122.95

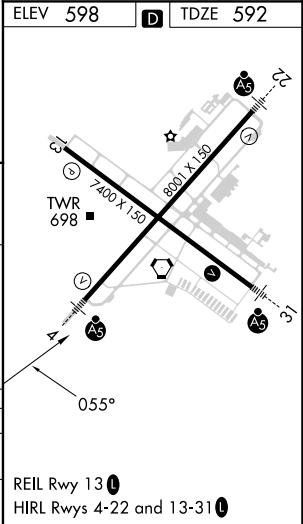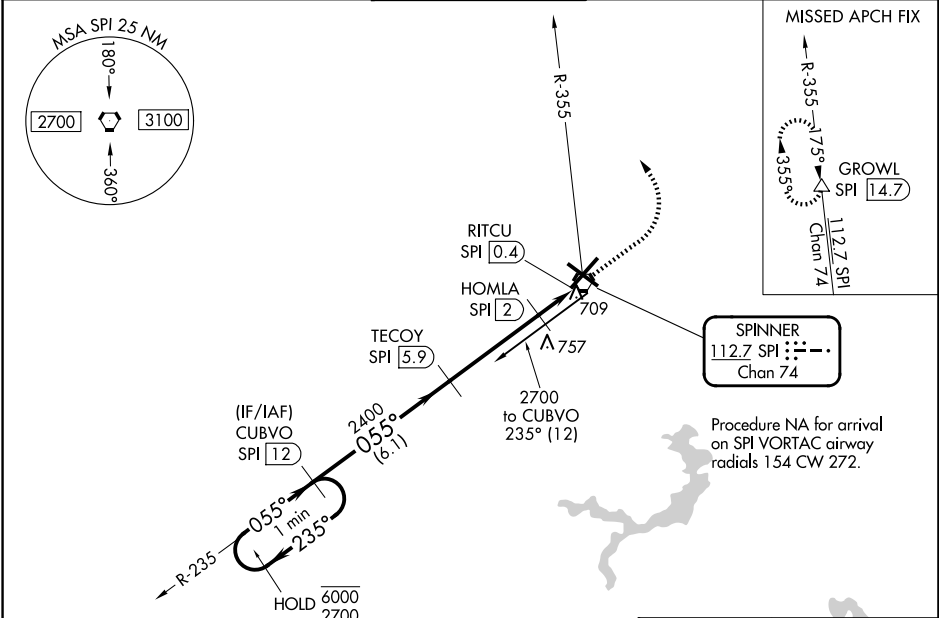

One Minute Holding Pattern	CUBVO SPI [12]	TECOY SPI [5.9]	1500	2500	SPI R-355	GROWL
6000 ← 235°	2700 → 055°	2400	hdg 325°	HOMLA SPI [2]	SPI [1.4]	RITCU SPI [0.4]
			3.00° TCH 56			
			1140			
			6.1 NM	4 NM	0.6	1 NM
CATEGORY	A	B	C	D		
S-4	960/24	368 (400-½)	960/40	368 (400-¾)		
CIRCLING	1040-1 442 (500-1)	1100-1 502 (600-1)	1360-2¼ 762 (800-2¼)	1380-2½ 782 (800-2½)		