

WAAS
CH **90113**
W36A

APP CRS
002°

Rwy Ldg
TDZE **2132**
Apt Elev **2132**

RNAV (GPS) RWY 36
KEARNEY RGNL (E.A.R.)

RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.


MALSR

MISSED APPROACH: Climb to 4700 direct HONVA and hold.

AWOS-3PT
123.875

MINNEAPOLIS CENTER
119.4 278.8

UNICOM
123.0 (CTAF) 0

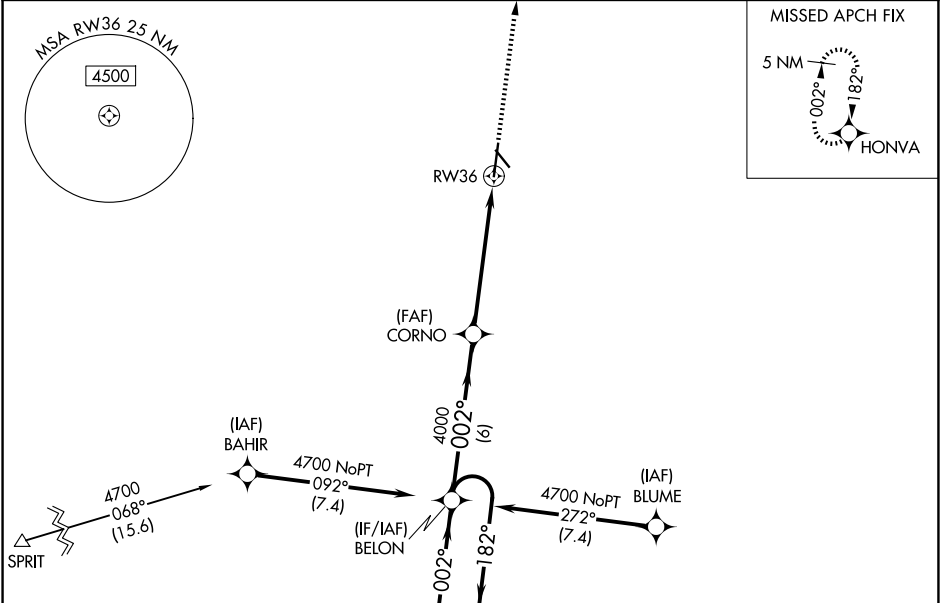

ELEV 2132 **D** TDZE 2132

5 NM Holding Pattern

17500 4700

182°

002°

BELON

4000

CORNO

1.3 NM to RW36

RW36

GP 3.00° TCH 44

6 NM

4.5 NM

1.3 NM

4700

HONVA

CATEGORY	A	B	C	D
LPV DA	2332-½ 200 (200-½)			
LNAV/VNAV DA	2419-½ 287 (300-½)			
LNAV MDA	2580-½ 448 (500-½)		2580-⅞ 448 (500-⅞)	
CIRCLING	2600-1 468 (500-1)		2640-1½ 508 (600-1½) 2840-2¼ 708 (800-2¼)	

81

13

100

7094 X 175

36

AS

002°

HIRL Rwy 18-36 0

MIRL Rwy 13-31 0

REIL Rwy 18 0

NC-2, 30 OCT 2025 to 27 NOV 2025

NC-2, 30 OCT 2025 to 27 NOV 2025