


WAAS CH 50244 W31A	APP CRS 300°	Rwy Ldg TDZE Apt Elev 8500 429 476
--	------------------------	--

RNAV (GPS) Z RWY 31L

PALM SPRINGS INTL (PSP)

RNP APCH-GPS.		MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct TANFY and track 107° to BANPE and track 144° to TRM VORTAC and hold. *Missed approach requires minimum climb of 355 feet per NM to 2100.			
⚠ Circling NA southwest of Rwy 13R-31L.					
ATIS 124.65	SOCAL APP CON 126.7 370.95 135.275 251.1	PALM SPRINGS TOWER * 119.7 (CTAF) 377.05	GND CON 121.9	CLNC DEL 128.35	UNICOM 122.95

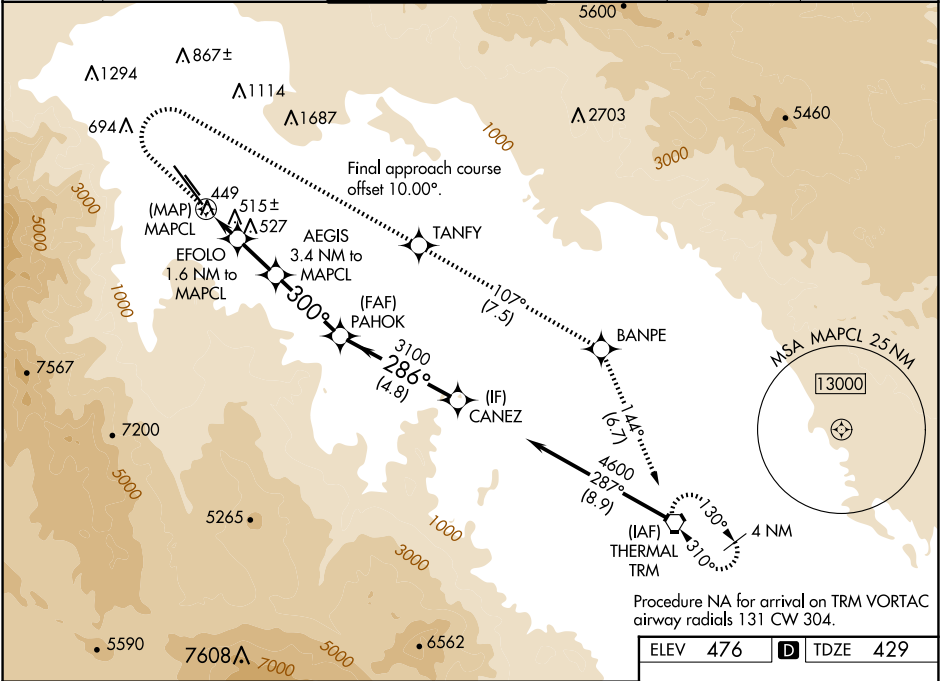

900 ↑	4000 ↗	TANFY ✧	tr 107°	BANPE ✧	tr 144°	TRM ◡	
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 55).						PAHOK	
Diagram details: The diagram shows a profile view of the descent path. Key altitudes include 4000, 3100, 1920, and 1220. Distances are marked as 0.5, 1.6 NM, 1.9 NM, 3.2 NM, and 4.8 NM. Symbols include a star for the intersection of the 3100 and 1920 paths, and a circle for the 1220 path. Text labels include 'EFOLO 1.6 NM to MAPCL', 'AEGIS 3.4 NM to MAPCL', 'MAPCL', 'TCH 55', and '3.50°'. The final destination is 'CANEZ' at 4600 feet.							
CATEGORY		A		B		C	D
LP	MDA	700-1 271 (300-1)		780-1 351 (400-1)		1320-2½ 891 (900-2½)	
LNAV MDA*		780-1 351 (400-1)					
LNAV MDA		920-1 491 (500-1)		1180-1¼ 751 (800-1¼)		1440-3 1011 (1000-3)	
C CIRCLING		920-1 444 (500-1)		1180-1¼ 704 (800-1¼)		1440-3 1760-3 964 (1000-3) 1284 (1300-3)	

