

WAAS CH 77623 W30A	APP CRS 301°	Rwy Ldg TDZE Apt Elev	5635 295 295
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 30

VISALIA MUNI (VIS)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM, LNAV Cats C/D to 1 SM.


MALSR

MISSED APPROACH: Climb to 3000 direct INOC1 and on track 267° to LATON and hold, continue climb-in-hold to 3000.

AWOS-3PT 119.925	FRESNO APP CON 118.5	CLNC DEL 118.5	UNICOM 123.05 (CTAF) 1
----------------------------	--------------------------------	--------------------------	---

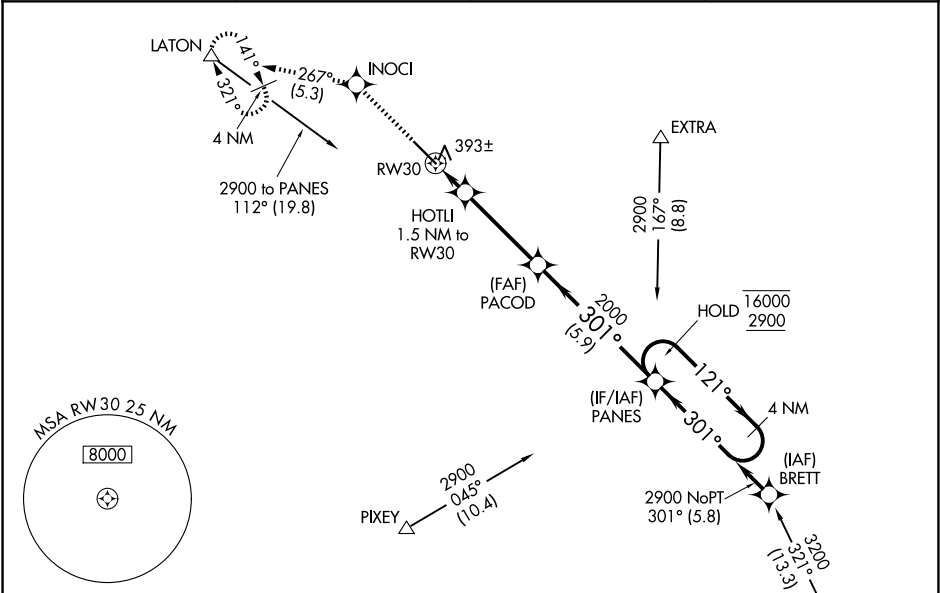

ELEV 295	D	TDZE 295
----------	----------	----------

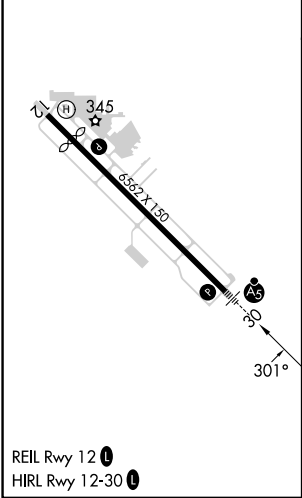

3000	INOC1	LATON	PANES	
↑	✧	tr 267°	△	
*LNAV only.				
		HOTLI 1.5 NM to RW30	PACOD 2000	PANES 4 NM Holding Pattern
		*1 NM to RW30	301°	121° → 16000 ← 301° 2900
		820*	2000	GP 3.00° TCH 53
	1 NM	0.5 NM	3.7 NM	5.9 NM
CATEGORY	A	B	C	D
LPV DA	502-½ 207 (300-½)			
LNAV/VNAV DA	554-½ 259 (300-½)			
LNAV MDA	660-½ 365 (400-½)		660-⅝ 365 (400-⅝)	
CIRCLING	720-1 425 (500-1)	760-1 465 (500-1)	760-1½ 465 (500-1½)	940-2 645 (700-2)