

LOC I-HFE	APP CRS	Rwy Ldg
111.7	281°	10102
		TDZE
		1174
		Apt Elev
		1203

ILS RWY 28R (SA CAT I & II)

PITTSBURGH INTL (PIT)


From NASTY: Radar required for procedure entry.

MALSR

Simultaneous approach authorized. DME from MMJ DME. Simultaneous reception of I-HFE and MMJ DME required. SA CAT I: Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD to DH. SA CAT II: Reduced lighting: requires specific OPSPEC, MSPEC, or LOA approval and use of autoland or HUD to touchdown.

MISSED APPROACH: Climb to 1800 then climbing right turn to 5000 direct EWC VOR/DME and hold.

D-ATIS	PITTSBURGH APP CON	PITTSBURGH TOWER	GND CON	CLNC DEL
ARR 127.25	123.95 360.8	128.3 291.7	SOUTH 121.9 348.6	126.75 353.7
DEP 135.9			NORTH 127.8 348.6	

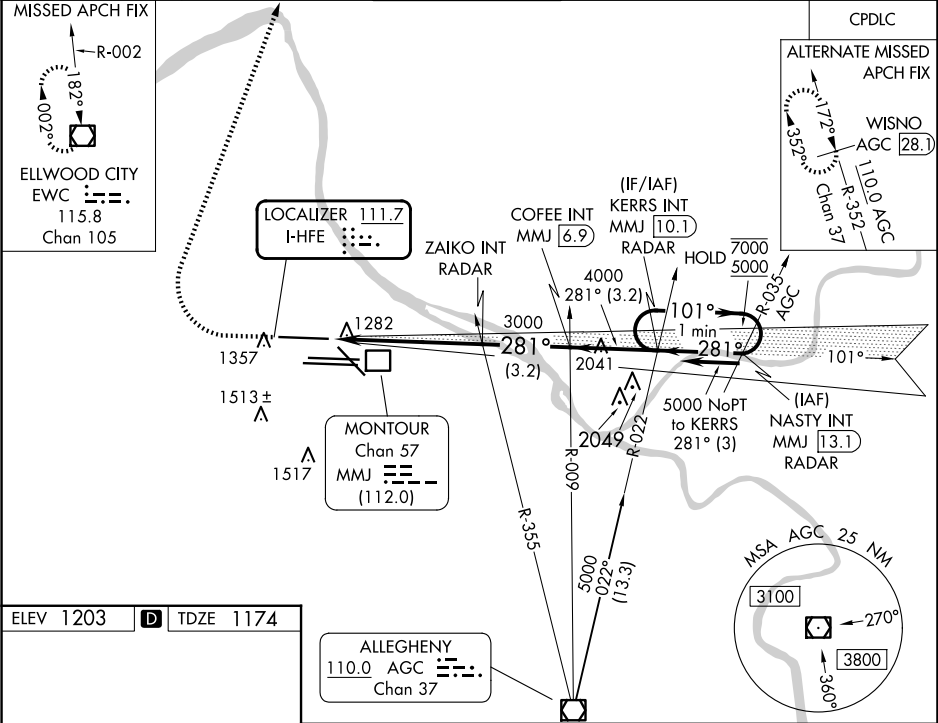

ELEV 1203 D TDZE 1174

REIL Rwy 10C
HIRL all Rwy's
TDZ/CL Rwy's 10L, 10R, 28L, 28R, 28C, and 32

1800 5000 EWC

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

KERRS INT MMJ 10.1 One Minute Holding Pattern

3000 4000 5000 7000

GS 3.00° TCH 55

CATEGORY	A	B	C	D
S-ILS 28R	SA CAT I	RA 192/14	150	DA 1324
S-ILS 28R	SA CAT II	RA 116/12	100	DA 1274

SA CATEGORY I & II ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED