

WAAS CH 70326 W32A	APP CRS 325°	Rwy Ldg 7466 TDZE 1124 Apt Elev 1203
--	------------------------	---

RNAV (GPS) Y RWY 32
PITTSBURGH INTL (PIT)

RNP APCH - GPS

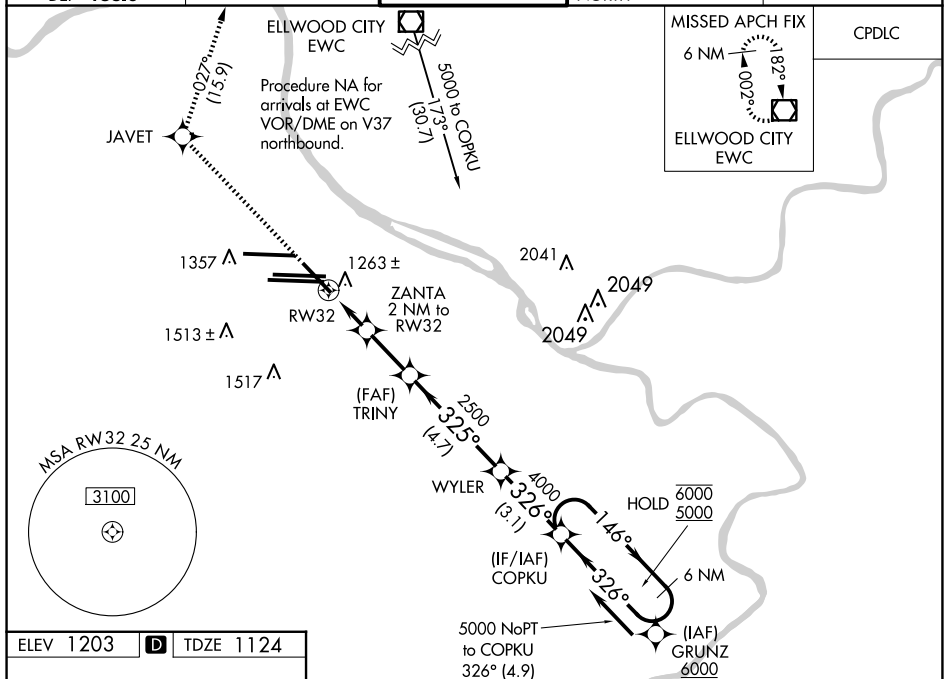
T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

MALS

A diagram showing a 4-ary tree structure. The root node is labeled A_4 and has four children, each represented by a horizontal line segment.

MISSED APPROACH: Climb to 4000 direct JAVET and on track 027° to EWC VOR/DME and hold.

D-ATIS			GND CON	
ARR 127.25	PITTSBURGH APP CON	PITTSBURGH TOWER	SOUTH 121.9 348.6	CLNC DEL
DEP 135.9	123.95 360.8	128.3 291.7	NORTH 127.8 348.6	126.75 353.7

[illegible]