WAAS CH 61010 W16B	APP CRS 164°	Rwy ldg 9426 TDZE 430 Apt Elev 433

RNAV (GPS) Y RWY 16C
SEATTLE-TACOMA INTL (SEA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cats C/D visibility to 1⅜ . See additional requirements on adjacent information page.

ALSF-2

MISSED APPROACH: Climb direct OTLIE to cross OTLIE at or below 2000, then climb to 5000 on track 163° to MILLT and hold, continue climb-in-hold to 5000.

D-ATIS	SEATTLE APP CON	SEATTLE TOWER	GND CON	CLNC DEL	CPDLC
118.0	133.65 273.45	119.9 239.3 (Rwys 16L, 16C, 34C, 34R) 120.95 239.3 (Rwys 16R, 34L)	121.7	128.0	

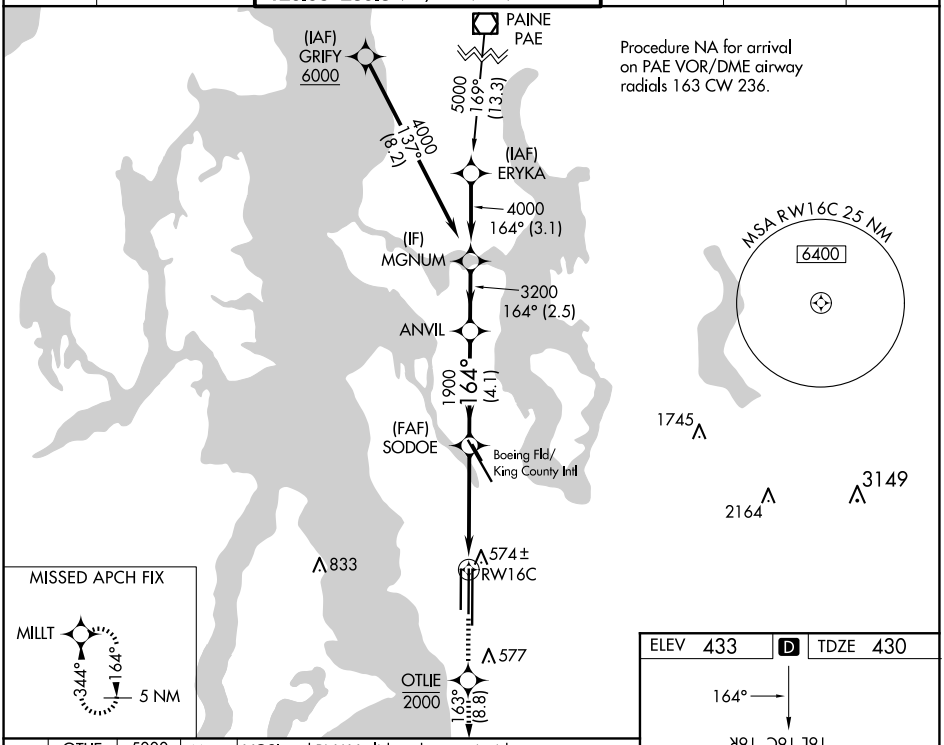

Procedure NA for arrival on PAE VOR/DME airway radials 163 CW 236.

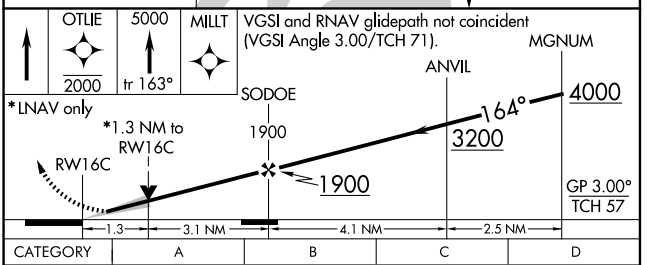

CATEGORY	A	B	C	D
LPV DA	630/18 200 (200-½)			
LNAV/VNAV DA	840/44 410 (500-⅞)			
LNAV MDA	920/24 490 (500-½)		920/50 490 (500-1)	
C CIRCLING	1000-1 567 (600-1)		1000-1½ 567 (600-1½)	1000-2 567 (600-2)

ELEV 433 D TDZE 430

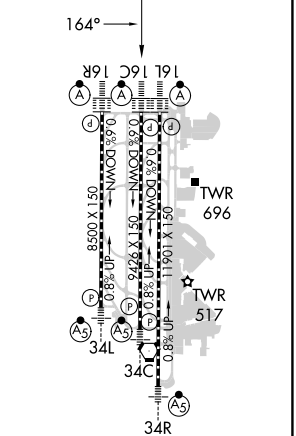

HIRL all Rwys
TDZ/CL Rwys 16L, 16C, 16R and 34R

NW-1, 30 OCT 2025 to 27 NOV 2025