

WAAS CH 63202 W16A	APP CRS 164°	Rwy Idg 11901 TDZE 432 Apt Elev 432
--	------------------------	--

RNAV (GPS) Y RWY 16L

SEATTLE-TACOMA INTL (SEA)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). Simultaneous approach authorized with Rwy 16R. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LPV all Cats visibility to RVR 4500, and increase LNAV Cats C/D visibility to RVR 6000.

ALSF-2

MISSED APPROACH: Climb direct CAVOB to cross CAVOB at or below 2000 then climb to 5000 on track 164° to MILLT and hold, continue climb-in-hold to 5000.

D-ATIS 118.0	SEATTLE APP CON 133.65 273.45	SEATTLE TOWER 119.9 239.3 (Rwys 16L, 16C, 34C, 34R) 120.95 239.3 (Rwys 16R, 34L)	GND CON 121.7	CLNC DEL 128.0	CPDLC
------------------------	---	--	-------------------------	--------------------------	-------

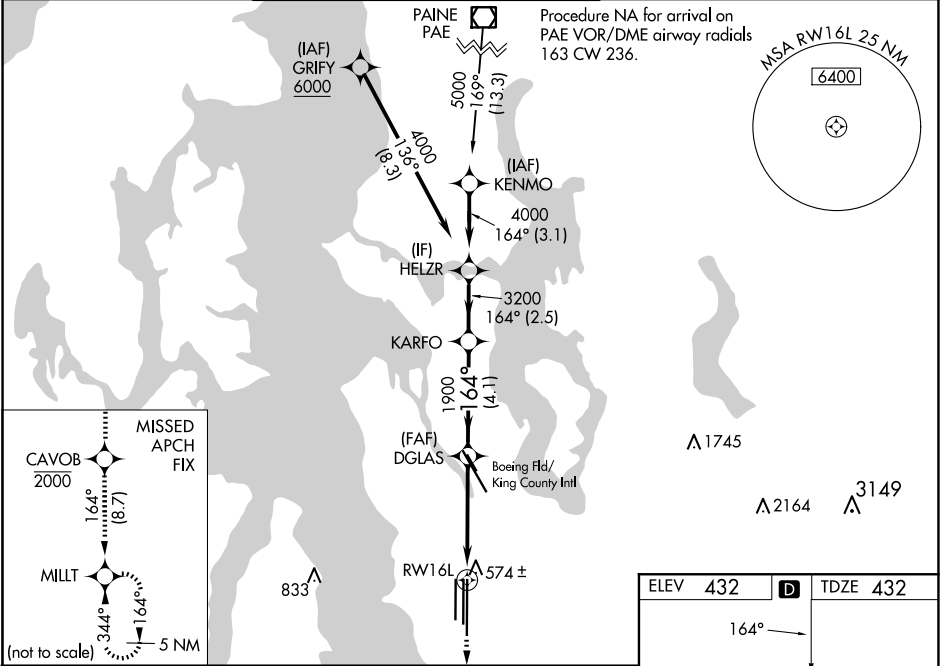

↑ CAVOB 2000

↑ 5000

↑ MILLT

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 76).

DGLAS 1900

KARFO 1900

HELZR 4000

3200

164°

GP 3.00° TCH 55

*LNAV only

*1 NM to RWY 16L


1 NM

3.4 NM

4.1 NM

2.5 NM

CATEGORY	A	B	C	D
LPV DA	700/24 268 (300-½)			
LNAV/ VNAV DA	766/32 334 (400-⅝)			
LNAV MDA	840/24 408 (500-½)	840/40 408 (500-¾)		
CIRCLING	1000-1 568 (600-1)	1000-1½ 568 (600-1½)		1000-2 568 (600-2)

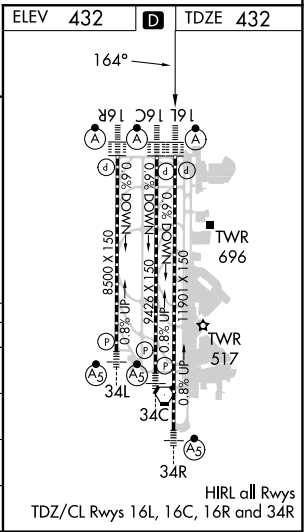

NW-1, 30 OCT 2025 to 27 NOV 2025

NW-1, 30 OCT 2025 to 27 NOV 2025