


WAAS CH 50408 W17A	APP CRS 175°	Rwy Ldg TDZE Apt Elev 7201 1004 1009
--	------------------------	--


RNAV (GPS) RWY 17
PONCA CITY RGNL (PNC)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 2700 direct ZULOT and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS increase LPV visibility all Cats to ½ SM.		

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

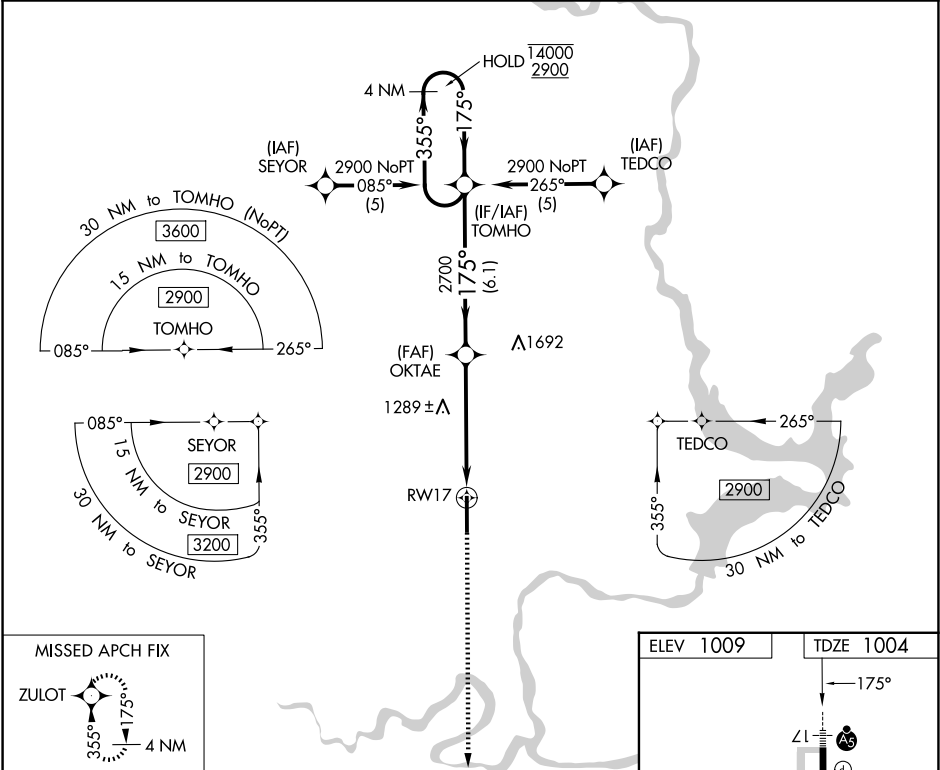

4 NM Holding Pattern				
GP 3.00° TCH 48				
CATEGORY	A	B	C	D
LPV DA	1279-½		275 (300-½)	
LNAV/VNAV DA	1330-½		326 (400-½)	
LNAV MDA	1540-½	536 (600-½)	1540-1	536 (600-1)
CIRCLING	1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2¼ 791 (800-2¼)	1880-2¾ 871 (900-2¾)

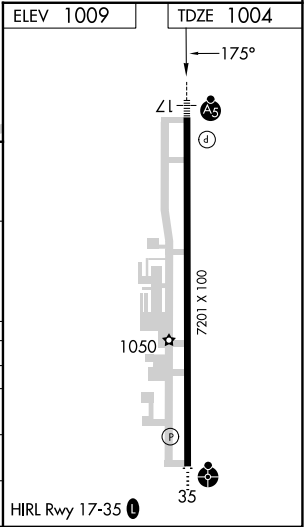

SC-1, 30 OCT 2025 to 27 NOV 2025

SC-1, 30 OCT 2025 to 27 NOV 2025