

WAAS CH 93808 W35A	APP CRS 355°	Rwy Ldg TDZE Apt Elev	7201 1008 1009
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 35
PONCA CITY RGNL (PNC)


RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using WLD altimeter setting. When local altimeter setting not received, use WLD altimeter setting and increase LPV DA to 1377 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1560 feet and all visibilities ⅓ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ½ SM.

ODALS

MISSED APPROACH: Climb to 2800 direct TOMHO and hold.

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	--

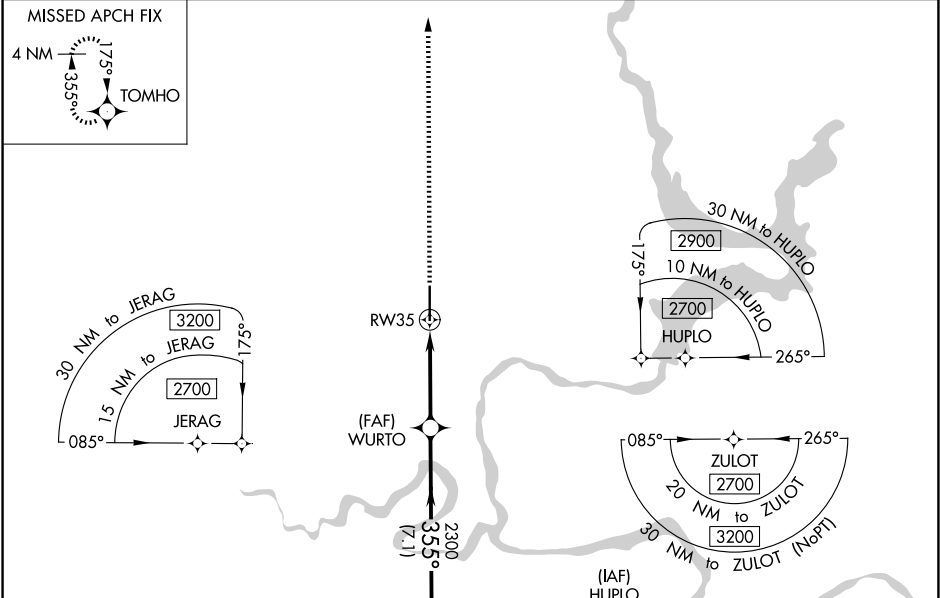

ELEV 1009 TDZE 1008

HIRL Rwy 17-35 0

4 NM Holding Pattern ZULOT 6000 2700 175° 355° GP 3.02° TCH 46

WURTO 2300 1.5 NM to RW35 2800 TOMHO

7.1 NM 2.4 NM 1.5 NM

CATEGORY	A	B	C	D
LPV DA		1295-3/4	287 (300-3/4)	
LNAV/VNAV DA		1478-1 1/4	470 (500-1 1/4)	
LNAV MDA	1540-3/4	532 (600-3/4)	1540-1 3/8	532 (600-1 3/8)
CIRCLING	1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2 1/4 791 (800-2 1/4)	1880-2 3/4 871 (900-2 3/4)

35° 355°

SC-1, 30 OCT 2025 to 27 NOV 2025

SC-1, 30 OCT 2025 to 27 NOV 2025