

NE-2, 30 OCT 2025 to 27 NOV 2025


D-ATIS
128.725
CLNC DEL
135.05 348.6
CPDIC
GND CON
121.9 348.6
KENNEDY TOWER
Rwys 4R/22L and 13L/31R
119.1 281.55
Rwys 4L/22R and 13R/31L
123.9 281.55
NEW YORK DEP CON
135.9 353.75

DEEZZ FIVE DEPARTURE (RNAV)

DEEZZ5.DEEZZ) 19JUL18

NEW YORK, NEW YORK
JOHN F KENNEDY INTL (JFK)

TOP ALTITUDE:
5000

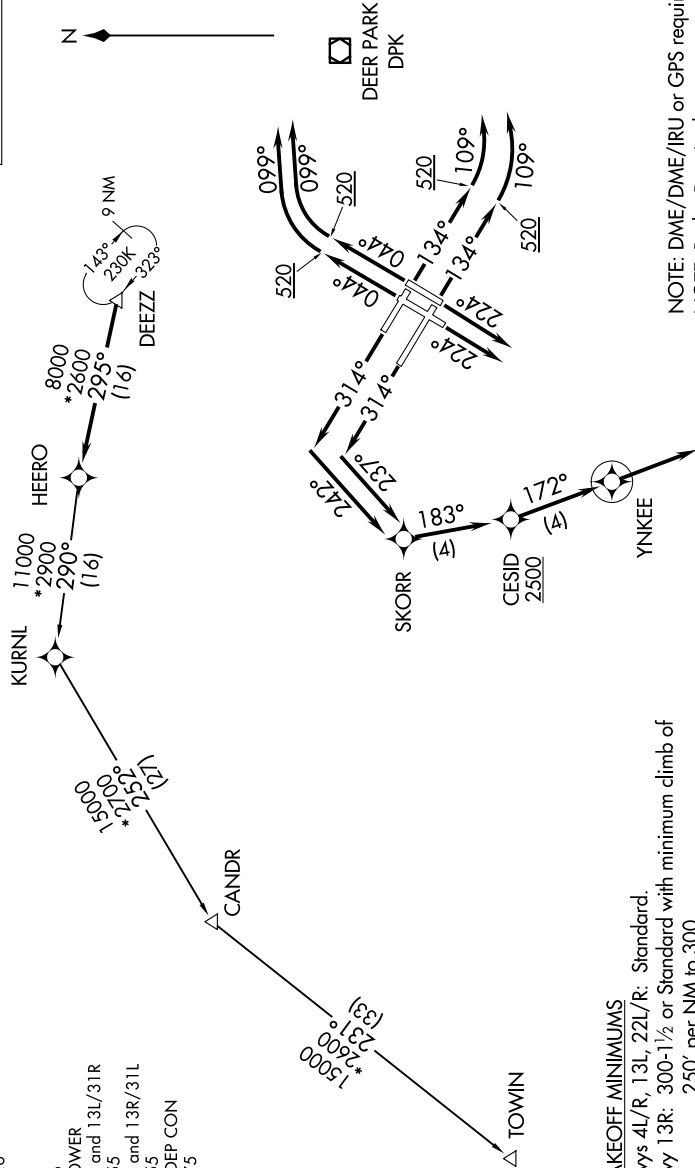

TAKEOFF MINIMUMS
Rwys 4L/R, 13L, 22L/R: Standard.
Rwy 13R: 300-1½ or Standard with minimum climb of 250' per NM to 300.
Rwys 31L/R: Standard with minimum climb of 500' per NM to 1400.

NOTE: DME/DME/IRU or GPS required.
NOTE: Radar Required.
NOTE: RNAV 1.
NOTE: TOWIN transition ATC assigned only.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

NE-2, 30 OCT 2025 to 27 NOV 2025