

WAAS CH 97333 W24B	APP CRS 240°	Rwy ldg TDZE 592 Apt Elev 592
--	------------------------	---

RNAV (GPS) Y RWY 24

NIAGARA FALLS INTL (IAG)


▼

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Buffalo Niagara Intl altimeter setting and increase all MDA 60 feet and increase LP Cats C and D visibility 1⁄8 mile and Circling Cats A and D visibility 1⁄4 mile. Rwy 6, 10R, 24, 28L helicopter visibility reduction below 1 SM NA. Straight-in Rwy 24 NA at night, Circling Rwy 6, 10R, 24, 28L NA at night.

MISSED APPROACH:

Climb to 1400 then climbing left turn to 3600 direct ZUPUV and hold.

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	CLNC DEL 119.25 251.1	UNICOM 122.95
----------------------------	---------------------------------------	--	-------------------------------	---------------------------------	-------------------------

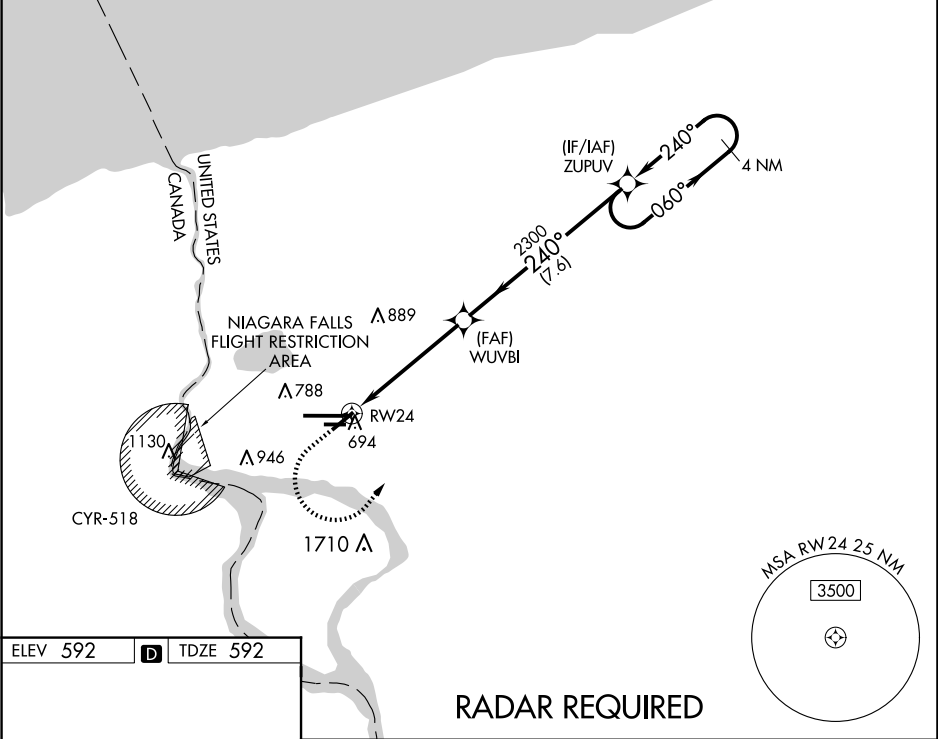

ELEV 592

D

TDZE 592

240°

10L

9826 X 150

3972 X 78

10R

28L

28R

TWR 651

TDZ/CL Rwy 28R

REIL Rws 6, 10R, 24, and 28L

HIRL Rwy 10L-28R

MIRL Rws 6-24 and 10R-28L

1400

↑

3600

↶

ZUPUV

✦

4 NM

Holding Pattern

ZUPUV

060° →

← 240°

3600

WUVBI

240°

2300

3.00°

TCH 48

RW24

5.2 NM

7.6 NM

CATEGORY	A	B	C	D
LP MDA	1180-1	588 (600-1)	1180-1¾	588 (600-1¾)
LNAV MDA	1360-1 768 (800-1)	1360-1¼ 768 (800-1¼)	1360-2½	768 (800-2½)
 CIRCLING	1360-1 768 (800-1)	1360-1¼ 768 (800-1¼)	1360-2½	768 (800-2½)