

WAAS CH 40014 W04A	APP CRS 042°	Rwy Idg 7734 TDZE 542 Apt Elev 544
--	------------------------	---

RNAV (GPS) RWY 4
TYLER POUNDS RGNL (TYR)

RNP APCH - GPS.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 ½ SM. LNAV all Cats visibility to 1 SM.

MALSR



MISSED APPROACH: Climb to 1100 then climbing right turn to 2500 direct OTTIE and hold.

ATIS 126.25	LONGVIEW APP CON ★ 128.75 379.15	POUNDS TOWER ★ 120.1 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

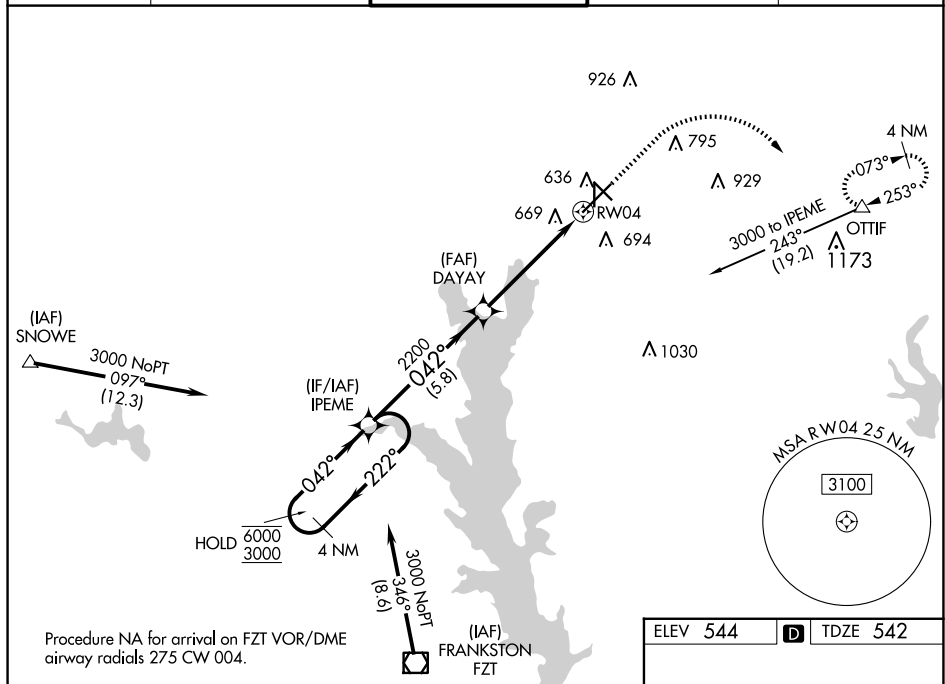

Procedure NA for arrival on FZT VOR/DME
airway radials 275 CW 004.

