

WAAS CH 70607 W13A	APP CRS 129°	Rwy Idg 7202 TDZE 607 Apt Elev 612
--	------------------------	---


RNAV (GPS) RWY 13

MUSKOGEE-DAVIS RGNL (MKO)

For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 47°C (116°F).
DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Tealuhquah altimeter setting. When local altimeter setting not received, use Tealuhquah altimeter setting: increase LPV DA to 948, LNAV/VNAV DA to 1233, and visibility LPV all Cats ½ SM and LNAV/VNAV all Cats ½ SM; increase all MDA 100 feet and visibility LNAV Cat C/D/E and Circling Cat D ½ SM, and Circling Cat C ¼ SM. Circling Rwy 4, 18, 22, 36 NA at night. Rwy 4, 18, 22, 36 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH:
Climb to 2800 direct
FALUN and hold.

ASOS 135.025	FORT WORTH CENTER 132.2 338.35	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

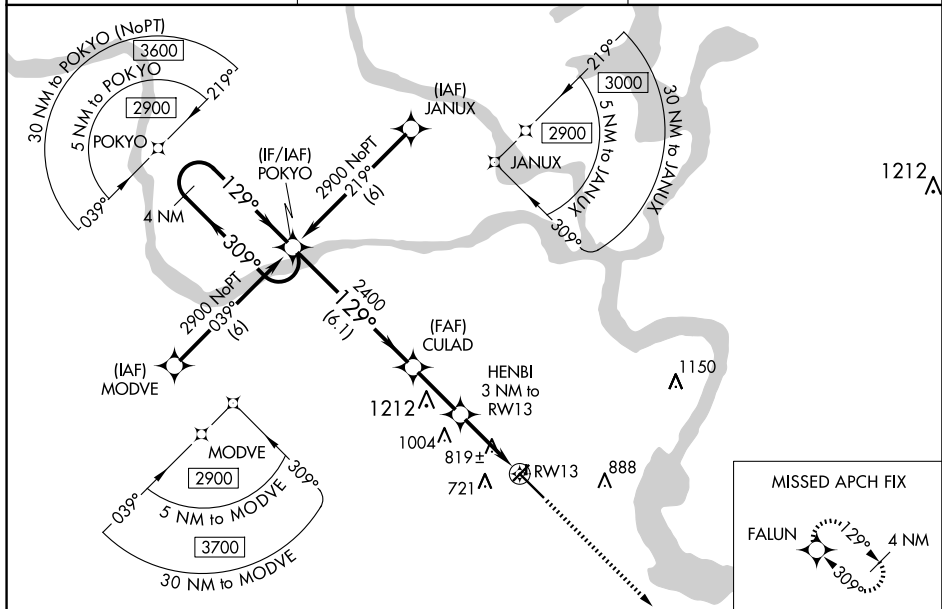

4 NM Holding Pattern

POKYO

CULAD

HENBI
3 NM to RW13

*1.6 NM to RW13

RW13

*129° only.

2900

← 309°

129° →

2400

GP 3.00°
TCH 50

6.1 NM

2.4 NM

1.4

1.6

129°

1904 X 60

18

22

175

36

4698

0.3 Up

7202 X 130

0.4 Up

696

31