

WAAS CH 86705 W14A	APP CRS 139°	Rwy Ldg 7540 TDZE 23 Apt Elev 30
--	------------------------	---

RNAV (GPS) RWY 14
SARASOTA/BRADENTON INTL (SRQ)

RNP APCH.


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When control tower closed, LPV and LNAV/VNAV NA; increase LNAV all Cats visibility to 1 mile. When control tower closed, inop table does not apply to LNAV Cats A and B. When control tower closed, for inop MALSR, increase LNAV Cats C and D visibility to 1½ mile.

MALSR




MISSED APPROACH: Climb to 3000 direct GINSE and on track 107° to MURDO and hold.

ATIS 124.375	TAMPA APP CON 119.65 353.575	SARASOTA TOWER ★ 120.1 (CTAF) 0 256.8	GND CON 121.9 273.6	CLNC DEL 118.25	UNICOM 122.95
-----------------	---------------------------------	--	------------------------	--------------------	------------------

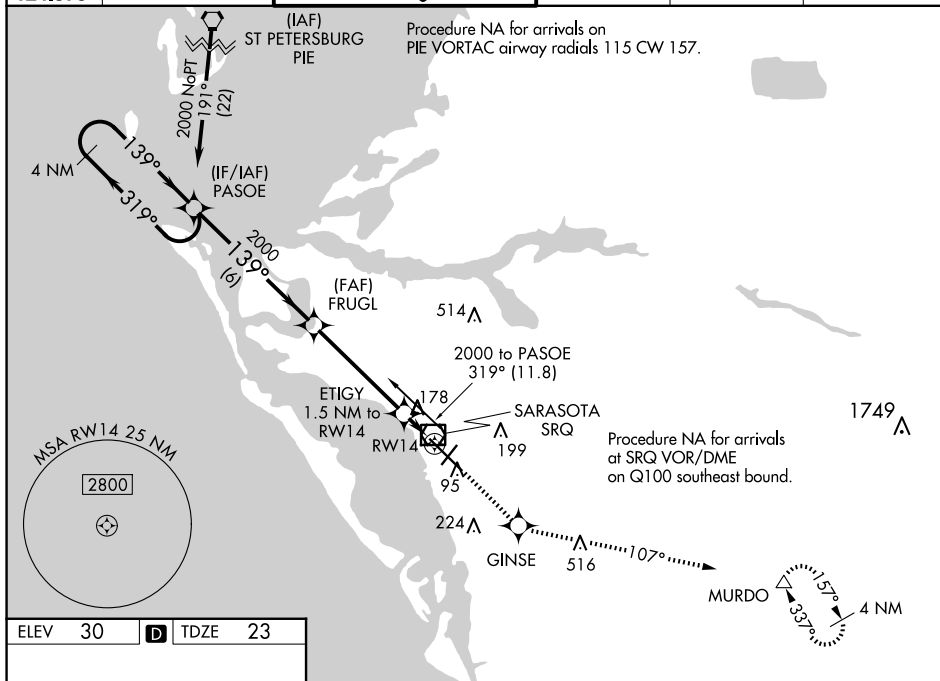

ELEV	30	D	TDZE	23
------	----	----------	------	----

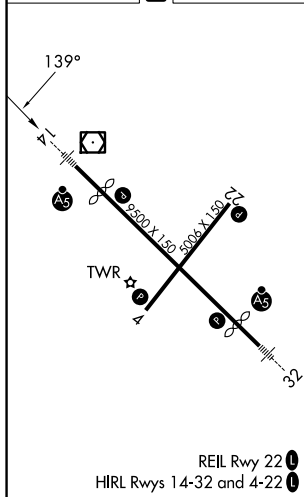

4 NM Holding Pattern

PASOE

FRUGL

3000

GINSE

tr 107°

MURDO

*LNAV only.

ETIGY
1.5 NM to RW14

RW14

GP 3.00°
TCH 54

CATEGORY	A	B	C	D
LPV DA	223-½	200 (200-½)		
LNAV/VNAV DA	489-1⅛	466 (500-1⅛)		
LNAV MDA	440-½	417 (500-½)	440-¾	417 (500-¾)
CIRCLING	500-1	470 (500-1)	600-1½ 570 (600-1½)	600-2 570 (600-2)