

WAAS CH 70609 W28A	APP CRS 288°	Rwy Ldg TDZE Apt Elev	5904 91 99
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 28R

MODESTO CITY-COUNTY-HARRY SHAM FLD (MOD)

RNP APCH.


T
A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C. For inoperative ALS, increase LNAV/VNAV all Cats visibility to $\frac{7}{8}$ SM.

MALSR




MISSED APPROACH: Climb to 500 then climbing left turn to 3000 direct SHEL and hold. continue climb-in-hold to 3000.

ATIS 127.7	NORCAL APP CON 120.95 269.45	MODESTO TOWER ★ 125.3 (CTAF) 0 257.8	GND CON 121.7	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

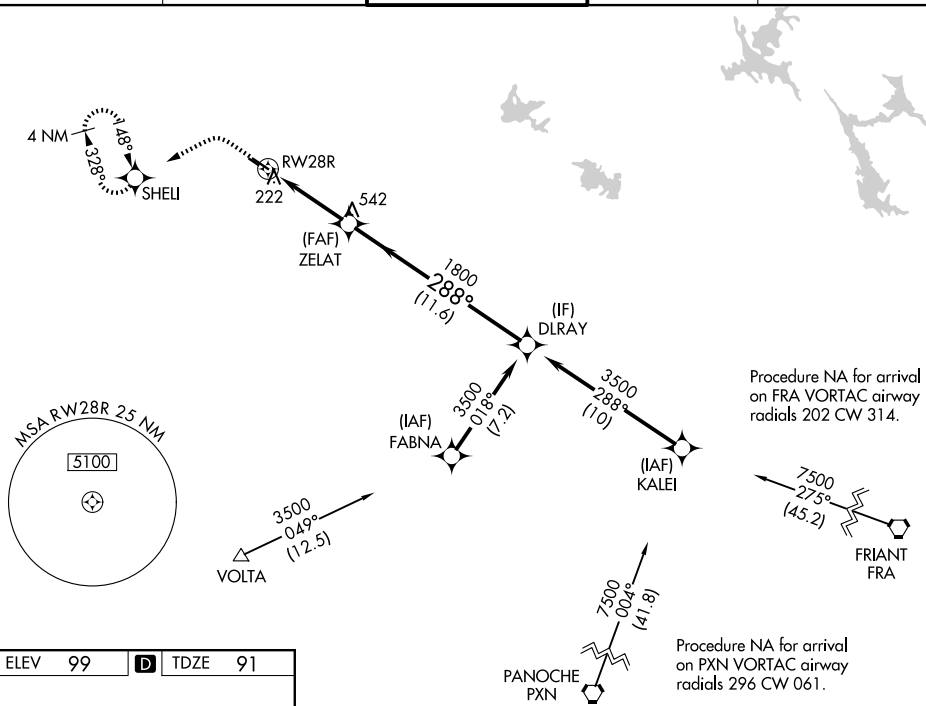

ELEV	99	D	TDZE	91
------	----	----------	------	----

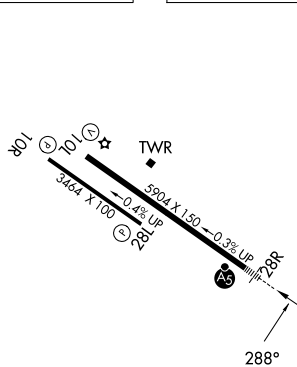

REIL Rwy 10L **L**
MIRL Rwy 10R-28L
HIRL Rwy 10L-28R **L**

Figure 1-1 illustrates a VORTAC station layout. The station is located 2 NM from the RW28R runway. The distance from the station to the 1800 MSL obstacle is 3.2 NM. The distance from the station to the 1800 MSL obstacle is 11.6 NM. The distance from the station to the 3500 MSL obstacle is 288°. The station is located 2 NM from the RW28R runway. The station is located 2 NM from the RW28R runway. The station is located 2 NM from the RW28R runway.