

WAAS CH 45599 W17A	APP CRS 176°	Rwy Idg 5500 TDZE 207 Apt Elev 208
--	------------------------	---

RNAV (GPS) RWY 17


OLYMPIA RGNL (OLM)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.
For inop ALS; increase LNAV/VNAV visibility all Cats to 1½ SM.
Increase LNAV Cats C/D to 1¾ SM.

MALSR

MISSED APPROACH: Climb to 4000 direct CORER and on track 181° to CETRA and hold, continue climb-in-hold to 4000.

ATIS 135.725	SEATTLE APP CON 121.1 290.9	OLYMPIA TOWER ★ 124.4 (CTAF) 0 254.25	GND CON 121.6	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------	-------------------------

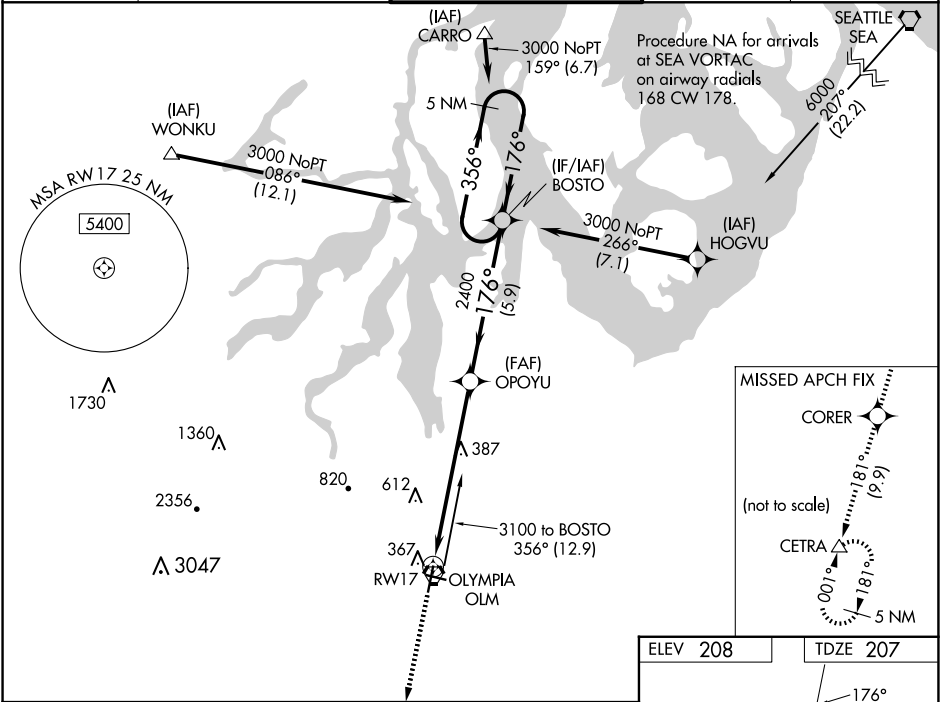

4000 CORER CETRA

tr 181°

OPOUY

BOSTO

5 NM Holding Pattern

*LNAV only

*1.3 NM to RW17

RW17

1.3

5.5 NM

5.9 NM

2400

356°

176°

3000

GP 3.00°

TCH 53

CATEGORY	A	B	C	D
LPV DA	407-½	200 (200-½)		
LNAV/VNAV DA	629-¾	422 (500-¾)		
LNAV MDA	680-½	473 (500-½)	680-1	473 (500-1)
CIRCLING	720-1 512 (600-1)	860-1 652 (700-1)	1020-2½ 812 (900-2½)	1020-2¾ 812 (900-2¾)

