



APP CRS	Rwy Ldg	5000
333°	TDZE	999
	Apt Elev	1009

RNAV (GPS) RWY 33

WORCESTER RGNL (ORH)

RNP APCH.	When local altimeter setting not received, use Bedford altimeter setting and increase all MDAs 200 feet and visibility LNAV Cat C/D ½ SM and visibility Circling Cat B ¼ SM. VDP NA with Bedford altimeter setting.	MISSED APPROACH: Climbing left turn to 3000 direct GRIPE and hold.
-----------	---	--

ATIS 126.55	BRADLEY APP CON 119.0 327.1	WORCESTER TOWER ★ 120.5 (CTAF) 263.0	GND CON 123.85	UNICOM 122.95
----------------	--------------------------------	---	-------------------	------------------

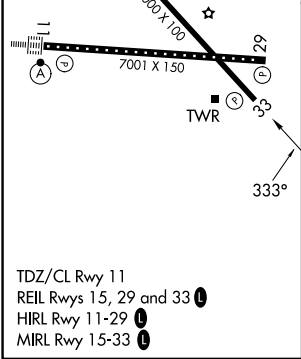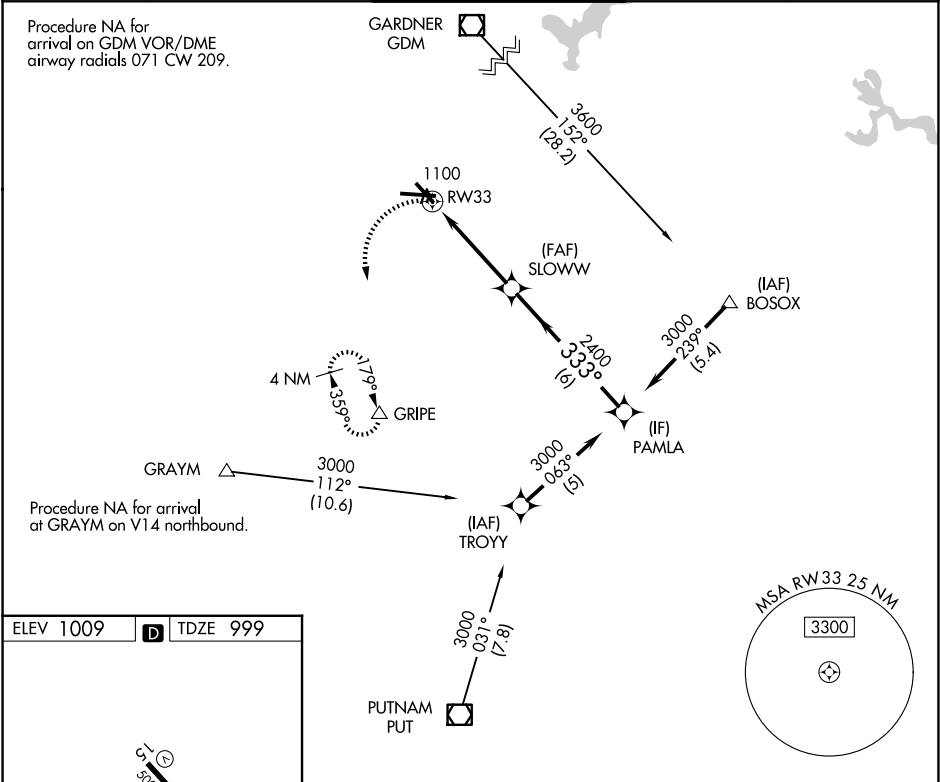

3000 		GRIPE 		Procedure Turn NA	
 RW33  1.1 NM to RW33		 SLOWW 		PAMLA  3000 	
 1.1 		3.1 NM  2400 		333°  6 NM 	
≤ 3.03°  TCH 40 					
CATEGORY	A		B	C	D
LNAV MDA	1480-1 482 (500-1)		1480 -1⅓ 482 (500-1⅓)		
CIRCLING	1560-1 551 (600-1)	1720-1 711 (800-1)	2000-3 991 (1000-3)		

NE-1, 30 OCT 2025 to 27 NOV 2025

NE-1, 30 OCT 2025 to 27 NOV 2025