

WAAS CH 93612 W24A	APP CRS 241°	Rwy Ldg TDZE Apt Elev 47
--	------------------------	---------------------------------------

RNAV (GPS) RWY 24

NANTUCKET MEML (ACK)

RNP APCH - GPS.

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cats C/D visibility to 1½ SM. When local altimeter setting not received, use HYA altimeter setting and increase LPV DA to 310 feet and all visibilities to RVR 2000; increase LNAV/VNAV DA to 363 feet; increase all MDAs 80 feet and LNAV visibility Cat C/D to RVR 6000 and Circling visibility Cat C/D ¼ SM. Baro-VNAV and VDP NA when using HYA altimeter setting. For inop ALS when using HYA altimeter setting, increase LPV and LNAV/VNAV visibility all Cats to RVR 4500 and LNAV Cat C/D to 1½ SM.

SSALR




MISSED APPROACH:
Climb to 2300 direct
UFTAC and hold.

ATIS 127.5	BOSTON APP CON 126.1 318.1	NANTUCKET TOWER ★ 118.3 (CTAF) 0	GND CON 132.5	CLNC DEL 119.375	UNICOM 122.95
----------------------	--------------------------------------	--	-------------------------	----------------------------	-------------------------

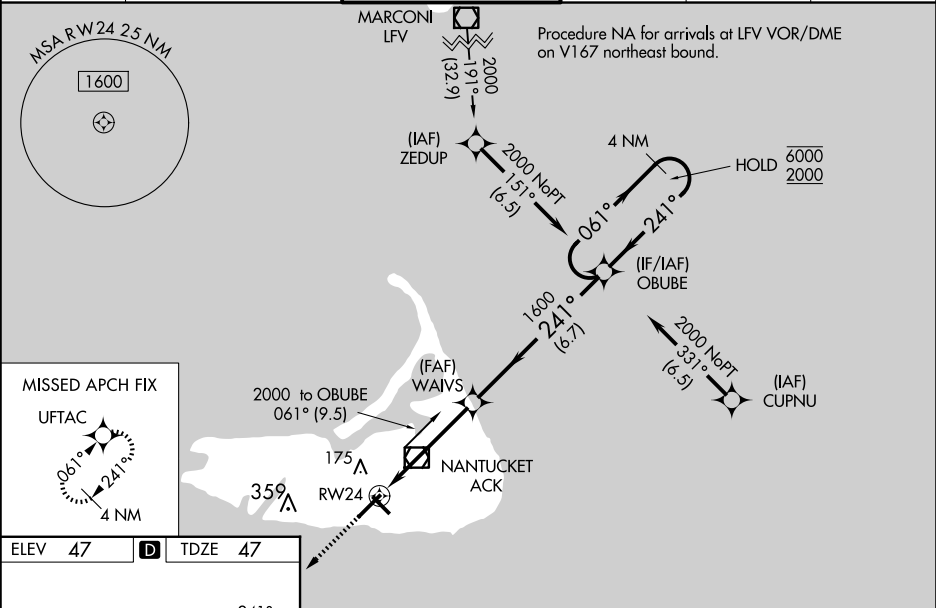

ELEV **47** **D** TDZE **47**



TDZ/CL Rwy 24
REIL Rwys 15 and 33
MIRL Rwy 15-33 **1**
HIRL Rwy 6-24 **1**

2300 UFTAC		4 NM Holding Pattern	
		OBUBE	
1.3 NM to RW24		WAIVS	
1600		061° → 6000	
241° ← 2000		GP 3.00°	
TCH 47			
1.3 NM		3.4 NM	
6.7 NM			
CATEGORY	A	B	C
LPV DA	247/18 200 (200-½)		
LNAV/VNAV DA	300/24 253 (300-½)		
LNAV MDA	520/24 473 (500-½)	520/50 473 (500-1)	
C CIRCLING	520-1 473 (500-1)	720-2 673 (700-2)	720-2¼ 673 (700-2¼)