

LAS VEGAS DEP CON
133.95 353.7
D-ATIS
132.4
CINC DEL
118.0
CPDLC
GND CON
121.1 270.8 E of 1R/19L
121.9 254.3 W of 1L/19R
LAS VEGAS TOWER
118.75 257.8 (Rwys 1L/19R, 1R/19L)
119.9 257.8 (Rwys 8L/26R, 8R/26L)

RNAV 1 - DME/DME/IRU or GPS.
RADAR required for non-GPS equipped aircraft.


TOP ALTITUDE:
FL190

(GIDGT3.GIDGT) 25247
GIDGT THREE DEPARTURE (RNAV) Departure Routes

AL-662 (FAA)

HARRY REID INTL (LAS)
LAS VEGAS, NEVADA

TAKEOFF MINIMUMS
Rwy 1L: Standard with minimum climb of 500' /NM to 2681', then 286' /NM to 4900.
Rwy 1R: Standard with minimum climb of 500' /NM to 2681', then 295' /NM to 4900.
Rwys 8L/R, 19L/R: Standard with minimum climb of 500' /NM to 2681'.
Rwy 26L: Standard with minimum climb of 500' /NM to 2681', then 204' /NM to 4100.
Rwy 26R: Standard with minimum climb of 500' /NM to 2681', then 271' /NM to 4100.

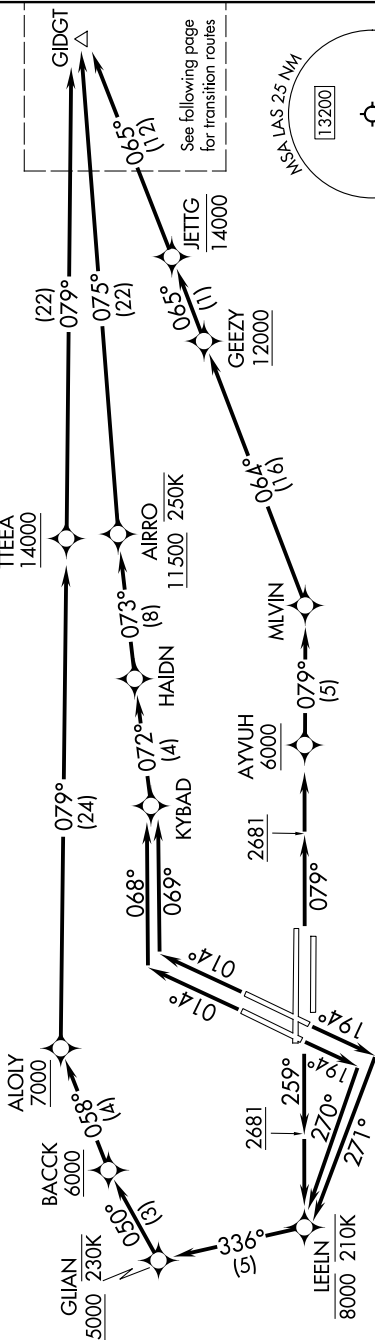

NOTE: Turboprop only.
NOTE: SSKEE and IWANS Transition assigned by ATC - do not file.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

GIDGT THREE DEPARTURE (RNAV) Departure Routes
(GIDGT3.GIDGT) 07AUG25

LAS VEGAS, NEVADA
HARRY REID INTL (LAS)