


APP CRS	Rwy Ldg	8807
194°	TDZE	2112
	Apt Elev	2181



RNAV (RNP) Z RWY 19L
HARRY REID INTL (LAS)

RNP AR APCH-GPS, RF, min RNP 0.50. Authorization required. Missed approach requires RNP <1.00.	MISSED APPROACH: Climb to 7000 on the RNAV missed approach route to MATLR and hold, continue climb-in-hold to 7000. *Missed approach requires minimum climb of 208 feet per NM to 4880.
▼ For uncompensated Baro-VNAV systems, procedure NA below 0°C or above 54°C.	

D-ATIS	LAS VEGAS APP CON	LAS VEGAS TOWER	GND CON	CLNC DEL	CPDLC
132.4	125.025 379.15 (West) 119.775 282.2 (East)	118.75 257.8 (Rwy 1L/19R, 1R/19L) 119.9 257.8 (Rwy 8L/26R, 8R/26L)	121.1 270.8 E of 1R/19L 121.9 254.3 W of 1L/19R	118.0	

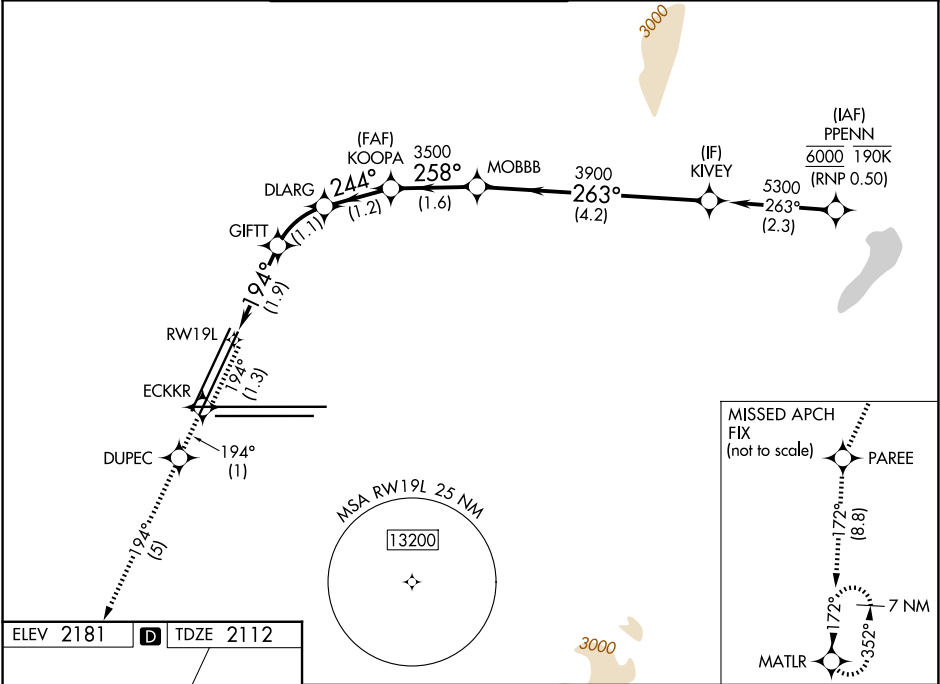

ELEV 2181	D	TDZE 2112
-----------	---	-----------

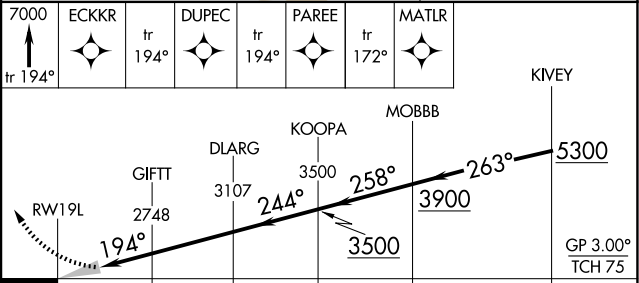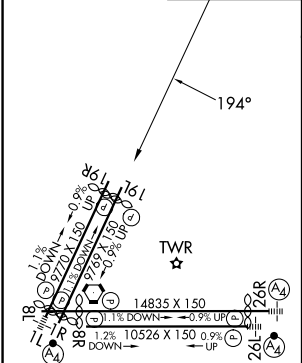

CATEGORY	A	B	C	D
RNP 0.10 DA*	2471-1	359 (300-1)		
RNP 0.30 DA	2559-1 $\frac{3}{8}$	447 (400-1 $\frac{3}{8}$)		

AUTHORIZATION REQUIRED