

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>53631</b><br><b>W22A</b> | APP CRS<br><b>218°</b> | Rwy Ldg <b>6145</b><br>TDZE <b>68</b><br>Apt Elev <b>75</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|



RNAV (GPS) RWY 22  
ATLANTIC CITY INTL (ACY)

|                                                                                                                                                                   |  |                                                          |                                                      |                                                                                                     |  |                                              |  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------|------------------------------------------------------|-----------------------------------------------------------------------------------------------------|--|----------------------------------------------|--|
| RNP APCH - GPS.                                                                                                                                                   |  |                                                          |                                                      | <p><b>MISSED APPROACH:</b> Climb to 600 then climbing right turn to 2000 direct TUBER and hold.</p> |  |                                              |  |
| <p><b>⚠</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.4°C (7°F) or above 54°C (130°F). Rwy 22 helicopter visibility reduction below ¾ SM NA.</p> |  |                                                          |                                                      |                                                                                                     |  |                                              |  |
| <p>ATIS</p> <p><b>125.725 316.15</b></p>                                                                                                                          |  | <p>ATLANTIC CITY APP CON</p> <p><b>124.6 327.125</b></p> | <p>ATLANTIC CITY TOWER</p> <p><b>120.3 239.0</b></p> | <p>GND CON</p> <p><b>121.9 284.6</b></p>                                                            |  | <p>CLNC DEL</p> <p><b>127.85 353.775</b></p> |  |


RADAR REQUIRED  
WHEN R-5002B  
IS ACTIVE.

CEDAR LAKE VCN 

Procedure NA for arrival on VCN VORTAC  
airway radials 066 CW 160.

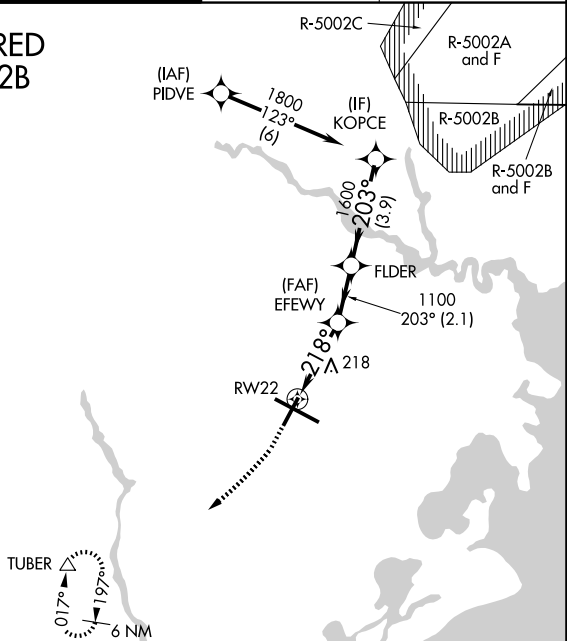

|         |          |         |
|---------|----------|---------|
| ELEV 75 | <b>D</b> | TDZE 68 |
|---------|----------|---------|



TDZ/CL Rwy 13  
HIRL Rwy 4-22 and 13-31  
REIL Rwy 31

ATLANTIC CITY, NEW JERSEY  
Amdt 4C 09SEP21

39°27'N-74°35'W

ATLANTIC CITY INTL (ACY)  
RNAV (GPS) RWY 22

NE-2, 30 OCT 2025 to 27 NOV 2025

|               |     |             |  |             |  |                 |  |                 |  |                 |  |
|---------------|-----|-------------|--|-------------|--|-----------------|--|-----------------|--|-----------------|--|
| 600<br>↑      |     | 2000<br>↗   |  | TUBER<br>△  |  |                 |  |                 |  |                 |  |
| * LNAV only.  |     |             |  |             |  |                 |  |                 |  |                 |  |
| CATEGORY      |     | A           |  | B           |  | C               |  | D               |  | E               |  |
| LPV           | DA  |             |  | 364-1       |  | 296 (300-1)     |  |                 |  |                 |  |
| LNAV/<br>VNAV | DA  |             |  | 356-7/8     |  | 288 (300-7/8)   |  |                 |  |                 |  |
| LNAV          | MDA | 520-1       |  | 452 (500-1) |  | 520-1 1/8       |  | 452 (500-1 1/8) |  |                 |  |
| CIRCLING      |     | 540-1       |  | 600-1       |  | 620-1 1/2       |  | 640-2           |  | 760-2 1/2       |  |
|               |     | 465 (500-1) |  | 525 (600-1) |  | 545 (600-1 1/2) |  | 565 (600-2)     |  | 685 (700-2 1/2) |  |