

OXNARD, CALIFORNIA

AL-674 (FAA)

25107

WAAS CH 86299 W25A	APP CRS 256°	Rwy Idg 5500 TDZE 44 Apt Elev 45
--	------------------------	---

RNAV (GPS) RWY 25
OXNARD (OXR)

RNP APCH - GPS.


T Inoperative table does not apply. Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 440 feet, LNAV/VNAV DA to 437 feet. Increase all MDAs 20 feet and Circling Cat C visibility ¼ SM.

MALSF



MISSED APPROACH: Climb to 2000 direct PEWKEE and on track 239° to SQUID and hold.

ATIS 118.05	POINT MUGU APP CON* 124.7 335.5	OXNARD TOWER* 134.95 (CTAF) 0 257.8	GND CON 121.9
-----------------------	---	---	-------------------------

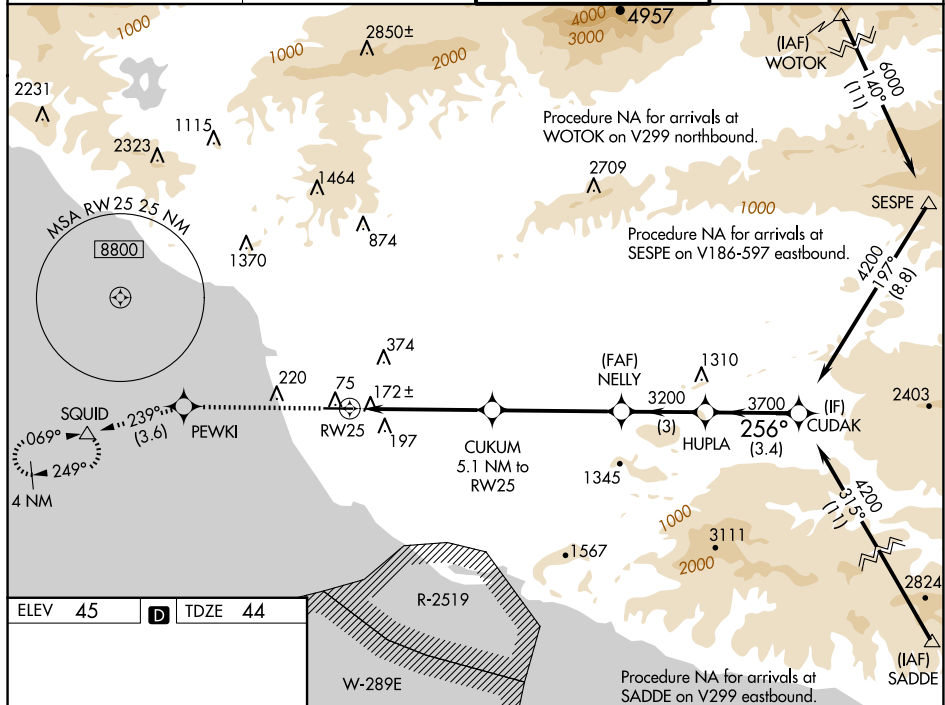

2000	PEWKI	SQUID		
↑	✦	tr 239°	△	
1.3 NM to RW25		CUKUM 5.1 NM to RW25		
1720		3200		
1.3 NM		3.8 NM		
A		B		
LPV DA		424-1 380 (400-1)		
LNAV/VNAV DA		421-1 377 (400-1)		
LNAV MDA		520-1 476 (500-1)		
CIRCLING		520-1 475 (500-1)		

OXNARD, CALIFORNIA
Amdt 1D 05SEP24

34°12'N-119°12'W

OXNARD (OXR)
RNAV (GPS) RWY 25

SW-3, 30 OCT 2025 to 27 NOV 2025