

LOC/DME I-MVY	APP CRS	Rwy Ldg	5504
108.7	236°	TDZE	63
Chan 24		Apt Elev	67

ILS or LOC RWY 24

MARTHA'S VINEYARD (MVY)

▼ VDP NA with Hyannis altimeter setting. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA to 317 feet and all MDA 60 feet; increase S-LOC Cats C and D visibility to RVR 5000, Circling Cat C and D visibility ¼ SM.


▲ For inoperative MALSR when using Hyannis altimeter setting, increase S-LOC Cats C and D visibility to 1¾ mile. Circling Rwy 15 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Hyannis altimeter setting).

MALSR



MISSED APPROACH:
Climb to 800 then
climbing left turn to 2500
on MVY VOR/DME R-180
to CLAMY INT/ACK 23.9
DME and hold.

ATIS	BOSTON APP CON	VINEYARD TOWER ★	GND CON	UNICOM
126.25	133.75	121.4 (CTAF) 0	124.35	122.95

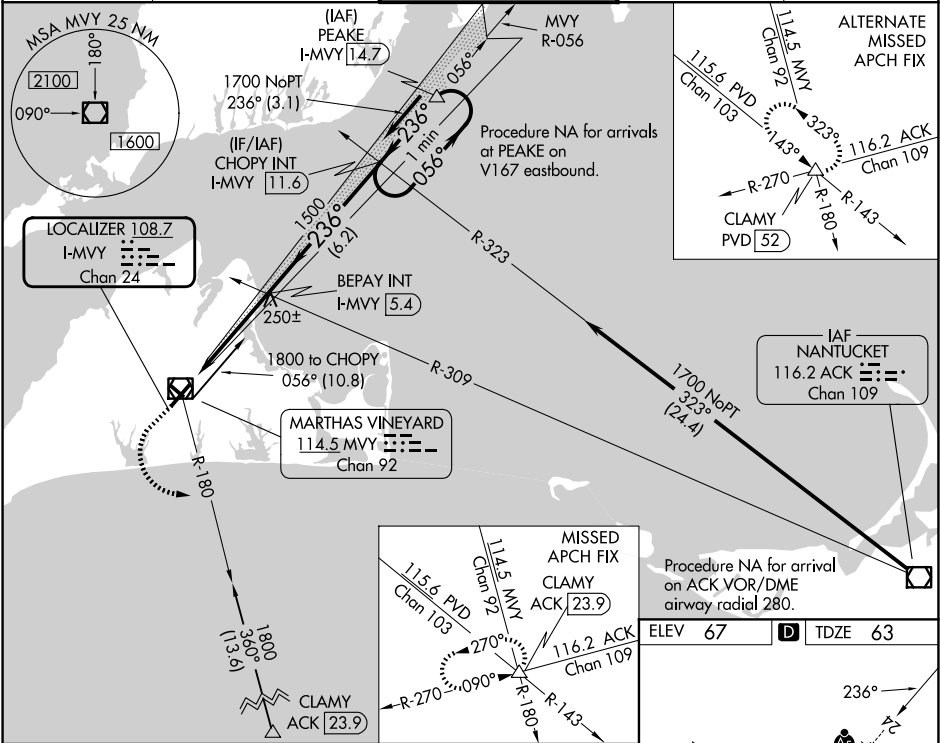

800

2500

CLAMY

Use I-MVY DME when on the localizer course.

*LOC only

*I-MVY

CHOPY INT I-MVY 11.6

BEPAY INT I-MVY 5.4

One Minute Holding Pattern

1500

236°

056°

1700

GS 3.00°

TCH 51

1.2 NM

3.2 NM

6.2 NM

CATEGORY

A

B

C

D

S-ILS 24**

263/24 200 (200-½)

S-LOC 24

500/24 437 (500-½)

500/40 437 (500-¾)


CIRCLING

500-1 540-1 700-1¾ 780-2¼

433 (500-1) 473 (500-1) 633 (700-1¾) 713 (800-2¼)

ELEV 67

TDZE 63



HIRL Rwy 6-24

MIRL Rwy 15-33

REIL Rwy 6

REIL Rwy 33

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28