

WAAS CH 48804 W24A	APP CRS 236°	Rwy Ldg TDZE Apt Elev	5504 63 67
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 24
MARTHA'S VINEYARD (MVY)


T For uncompensated Baro-VNAV systems, INAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase INAV/VNAV all Cats visibility to RVR 5200; increase INAV Cats C/D visibility to RVR 5000; increase Circling visibility Cts C to 2 miles and D to 2 1/2 mile. For inop MALSR, increase INAV/VNAV all Cats visibility to 1 1/2 mile. For inop MALSR using Hyannis altimeter setting, increase LPV all Cats visibility to RVR 4000, INAV/VNAV all Cats visibility to 1 1/2 mile and increase INAV Cats C/D visibility to 1 1/2 mile. VDP and Baro-VNAV NA when using Hyannis altimeter setting. Night landing: Rwy 15 NA. ** RNP 1800 authorized with use of FD or AP or HUD to DA, NA when using Hyannis altimeter setting.

MALSR



MISSED APPROACH:
Climb to 500 then
climbing left turn to
2500 direct CLAMY
and hold.

ATIS 126.25	BOSTON APP CON 133.75	VINEYARD TOWER ★ 121.4 (CTAF) 0	GND CON 124.35	UNICOM 122.95
-----------------------	---------------------------------	---	--------------------------	-------------------------

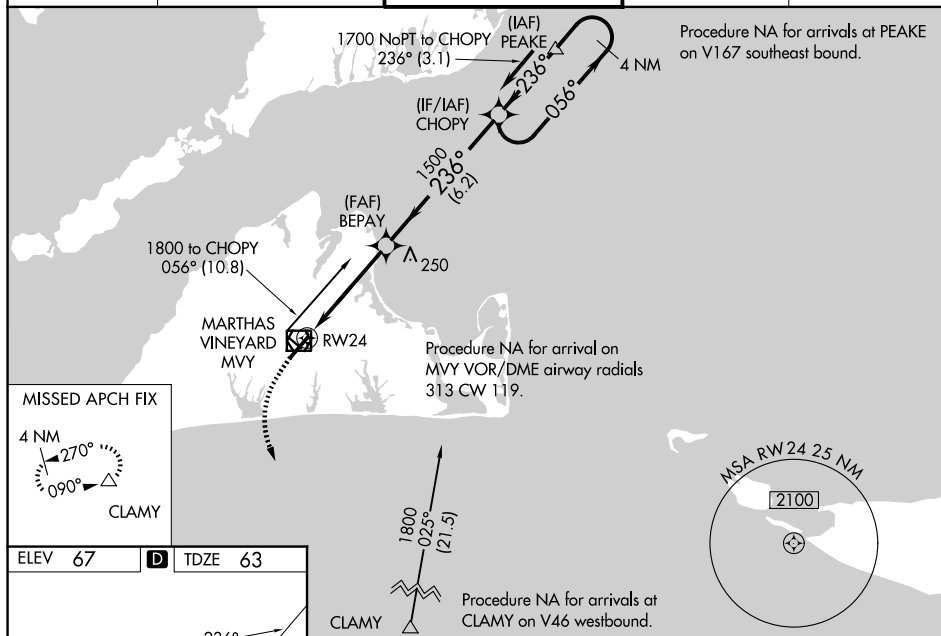

ELEV 67	D	TD7F 63
---------	----------	---------

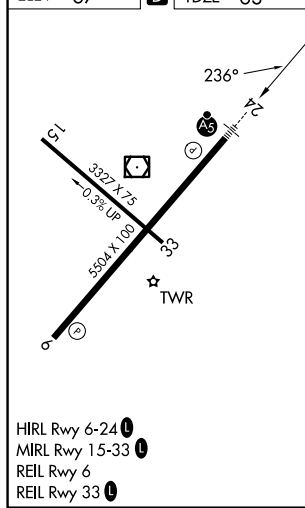


Diagram illustrating a 4 NM Holding Pattern. The pattern is defined by a 1.2 NM radius (RW24) and a 3.2 NM radius (BEPAY). The pattern is divided into three segments: A (1.2 NM), B (3.2 NM), and C (6.2 NM). The pattern is labeled with 'CLAMY' and 'CHOPY'. The pattern is defined by a 1.2 NM radius (RW24) and a 3.2 NM radius (BEPAY). The pattern is divided into three segments: A (1.2 NM), B (3.2 NM), and C (6.2 NM). The pattern is labeled with 'CLAMY' and 'CHOPY'.