

WAAS CH 49116 W24A	APP CRS 236°	Rwy Ldg 5000 TDZE 403 Apt Elev 407
--	------------------------	---



RNAV (GPS) RWY 24

OWENSBORO/DAVIESS COUNTY RGNL (OWB)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Rwy 24 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Evansville altimeter setting: increase LPV DA to 712 feet and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 902 feet and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cats C/D visibility ¼ mile. Baro-VNAV and VDP NA when using Evansville altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
FOLAB and hold.

AWOS-3PT 119.025	EVANSVILLE APP CON ★ 124.025 290.9	OWENSBORO TOWER ★ 120.7 (CTAF) 0 251.15	GND CON 121.7	UNICOM 122.95
----------------------------	--	---	-------------------------	-------------------------

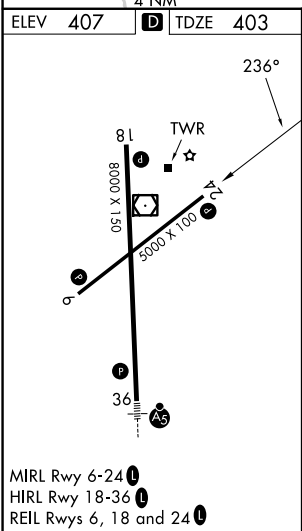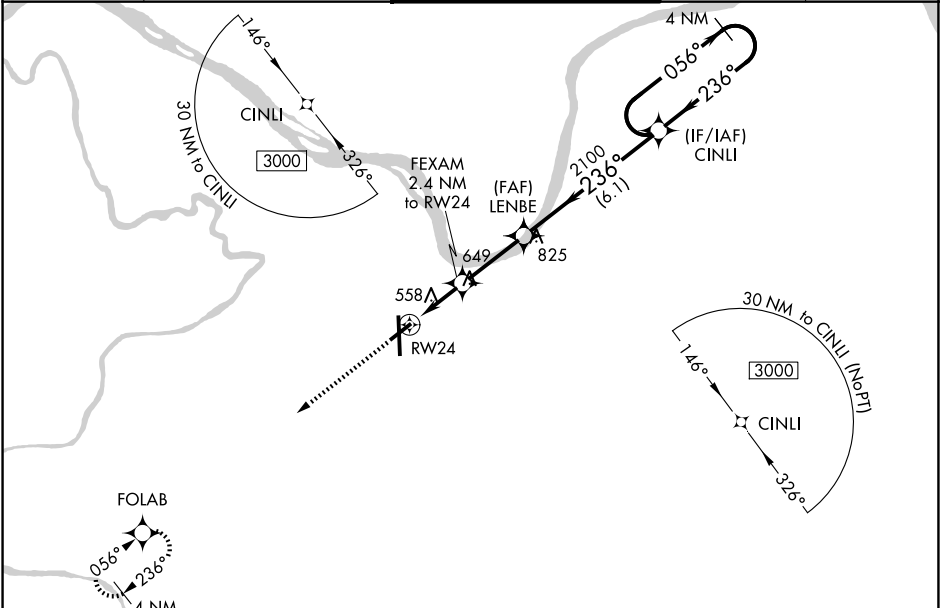

ELEV 407	D	TDZE 403
3000	FOLAB	
* LNAV only.		
RW24	FEXAM 2.4 NM to RW24	LENBE 2.1 NM to RW24
1.2 NM	1.2 NM	2.8 NM
1200	2100	2100
1.2 NM	2.8 NM	6.1 NM
CINLI		
056°	236°	056°
3000		3000
GP 3.00°		TCH 45
CATEGORY	A	B
LPV DA	653-¾	250 (300-¾)
LNAV/VNAV DA	843-1½	440 (500-1½)
LNAV MDA	820-1 417 (500-1)	820-1½ 417 (500-1½)
CIRCLING	860-1 453 (500-1)	1120-1 713 (800-1)

SE-1, 30 OCT 2025 to 27 NOV 2025

SE-1, 30 OCT 2025 to 27 NOV 2025