

RNAV (GPS) RWY 25

LITTLE ROCK AFB (KLRF)

WAAS CH 67565 W25A	APCH CRS 252°	Rwy Idg 12,001 TDZE 301 Arpt Elev 312
--	-------------------------	--

- (USAF)


RNP APCH - GPS		ALSF-2 	MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct HERCK and hold.		
RADAR required					
▼ * When ALS inop, increase RVR to 40, vis to 3/4 mile. When TDZL/CL inop increase RVR to 24.					
ATIS★ 119.175 251.1	APP CON/DEP CON 119.5 306.2	TOWER 120.6 269.075	GND CON 132.8 275.8	CLNC DEL★ 253.5	

**** When ALS inop, increase CAT
AB RVR to 55, vis to 1 mile;
CAT CD vis to 1 3/8 miles.**


*** Circling not authorized
S of Rwy 7-25

ALTERNATE MISSED APPROACH:
Climbing to 3000, fly runway
heading until 2 DME then right
turn heading 360°, expect
RADAR vectors from ATC.


ATC RADAR required for holding above 4000' or greater than 200 KIAS.

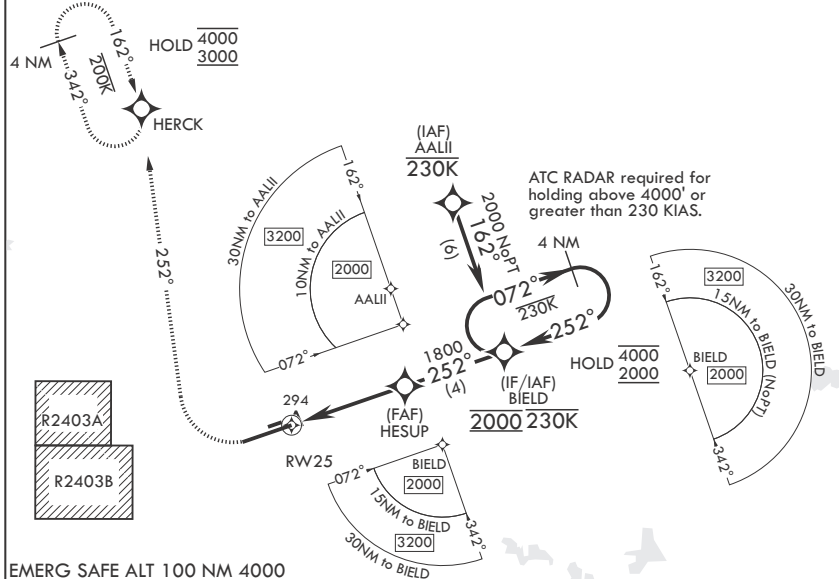

EMERG SAFE ALT 100 NM 4000

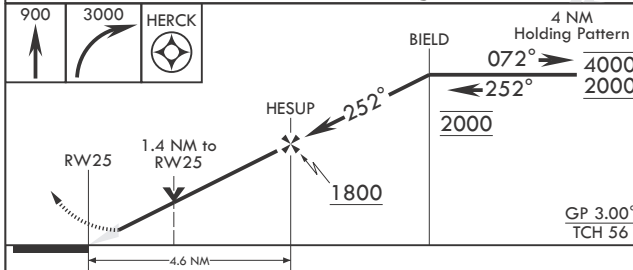

CATEGORY	A	B	C	D
LPV DA*	501/18	200	(200-½)	
LNAV MDA**	780/24	479 (500-½)	780/50	479 (500-1)
C CIRCLING***	780-1 468 (500-1)	920-1 608 (700-1)	920-1½ 608 (700-1½)	1040-2¼ 728 (800-2¼)



RNAV (GPS) RWY 25