


OLGUY THREE DEPARTURE (RNAV)

TOP ALTITUDE:
Assigned by ATC

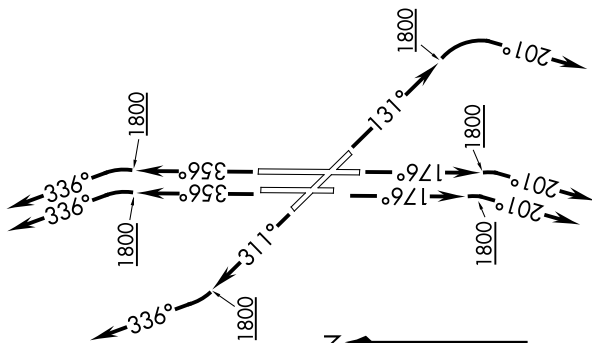

NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

NOTE: Chart not to scale.

TAKEOFF MINIMUMS:

Rwys 13, 17L/R, 31, 35L/R:

Standard with minimum climb of 500' per NM to 2100.

ATIS
128.725
GND CON
121.7
WILEY POST
126.9 306.
SPOKE CITY D
124.6 266.

WILEY POST TOWER *

126.9 306.9
124.6 266.8

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to BEEDI, thence
TAKEOFF RWYS 17L/R: Climb on heading 176° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to BEEDI, thence
TAKEOFF RWY 31: Climb on heading 311° to 1800, then right turn heading 336° or as assigned by ATC, expect RADAR vectors to BEEDI, thence
TAKEOFF RWYS 35L/R: Climb on heading 356° to 1800, then left turn heading 336° or as assigned by ATC, expect RADAR vectors to BEEDI, thence
. on track 267° to OLGUY then on (transition). Maintain 3000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

GRUVN TRANSITION (OLGUY3.GRUVN):
YOUSE TRANSITION (OLGUY3.YOUSE):

OLGUY THREE DEPARTURE (RNAV)
(OLGUY3.OLGUY) 07DEC17

OKLAHOMA CITY, OKLAHOMA
WILEY POST (PWA)