

25051


RNAV (GPS) Z RWY 10L
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 7°C or above 54°C. Inop table does not apply to LPV all Cats. LNAV procedure NA during simultaneous operations. For inop LVS, increase LNAV/VNAV visibility all Cats to 1½ SM, LNAV visibility Cat A and B to RVR 5500 and Cats C/D to RVR 6000. Use of FD or AP required during simultaneous operations. Simultaneous approach authorized.




MISSED APPROACH: Climb to 800 then climbing left turn to 4000 direct MARTS and hold. Continue climb-in-hold to 4000.


D-ATIS 135.0	MIAMI APP CON 133.775 285.6	FORT LAUDERDALE TOWER 119.3 257.8	GND CON 121.4	CLNC DEL 128.4	CPDLC
-----------------	--------------------------------	--------------------------------------	------------------	-------------------	-------

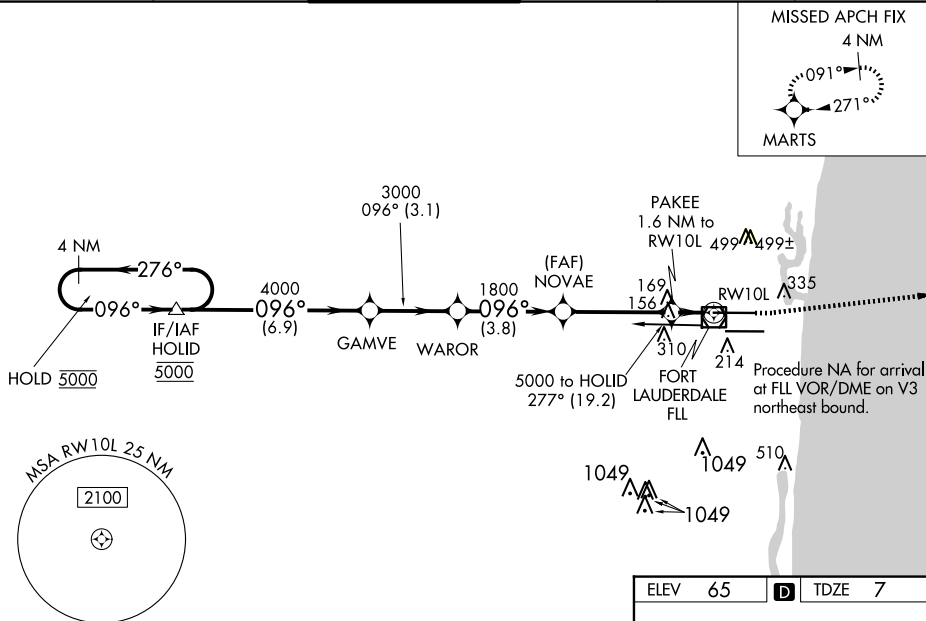

ELEV	65		TDZE	7
------	----	---	------	---

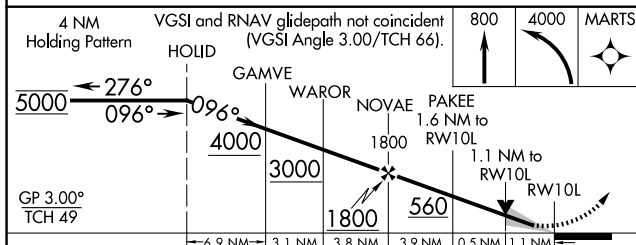

CATEGORY		A	B	C	D
LPV	DA	207/24		200 (200-½)	
LNAV/ VNAV	DA	495/50		488 (500-1)	
LNAV	MDA	420/24	413 (400-½)	420/40	413 (400-¾)
 CIRCLING		680-1	615 (700-1)	800-2 735 (800-2)	800-2¼ 735 (800-2¼)



HIRL Rwy 10L-28R and 10R-28L

FORT LAUDERDALE/HOLLYWOOD INTL (FLL)
RNAV (GPS) Z RWY 10L