

APP CRS
204°

Rwy Ldg
TDZE
25

Apt Elev
53

RNAV (GPS) RWY 20


KAHULUI (OGG)(PHOG)

RNP APCH.

When local altimeter setting not received, procedure NA.

MISSED APPROACH: Climb to 500 then climbing left turn to 4300 direct NDREW and hold.

ATIS 128.6	HCF APPROACH 120.2 322.4 (N) 119.5 225.4 (S)	MAUI TOWER ★ 118.7 (CTAF) 0 279.6	GND CON 121.9 279.6	UNICOM 122.95
----------------------	--	---	-------------------------------	-------------------------

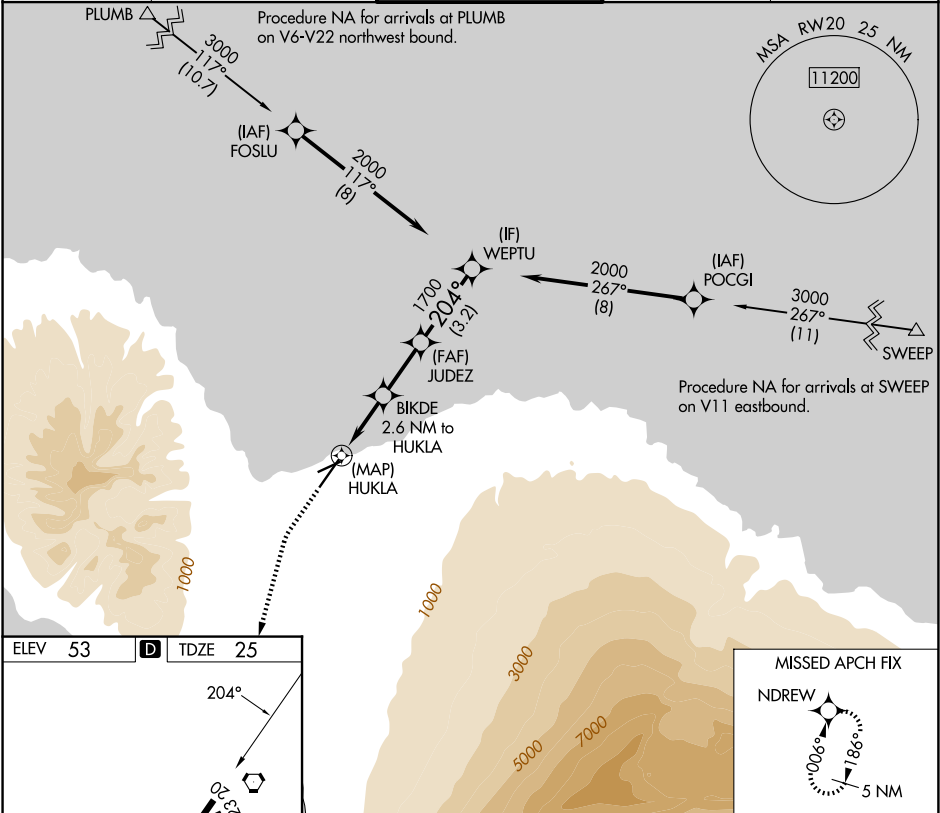

500	4300	NDREW	VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 76).		WEPTU
0.2	0.8	1.8 NM	2.3 NM	3.2 NM	
CATEGORY	A		B	C	D
LNAV MDA	400-1 375 (400-1)				
CIRCLING	500-1 447 (500-1)	620-1 567 (600-1)	740-2 687 (700-2)	1140-3 1087 (1100-3)	

500	4300	NDREW	VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 76).		WEPTU
0.2	0.8	1.8 NM	2.3 NM	3.2 NM	
CATEGORY	A		B	C	D
LNAV MDA	400-1 375 (400-1)				
CIRCLING	500-1 447 (500-1)	620-1 567 (600-1)	740-2 687 (700-2)	1140-3 1087 (1100-3)	