

WAAS CH 73003 W08A	APP CRS 083°	Rwy Ldg 5646 TDZE 545 Apt Elev 545
--	------------------------	---

RNAV (GPS) RWY 8
LACONIA MUNI (LCI)

RNP APCH - GPS.	
-----------------	--

T When local altimeter setting not received, use Concord altimeter setting and increase LPV DA to 1059 feet and all visibilities $\frac{1}{2}$ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D $\frac{1}{2}$ SM. VDP NA when using Concord altimeter setting. Circling NA south of Rwy 8-26. Circling Rwy 26 NA at night. For inop ALS, increase LPV visibility to $\frac{1}{4}$ SM and LNAV visibility Cat A to 1 SM Cats C and D visibility to $2\frac{1}{2}$ SM.



MALSR





MISSED APPROACH:
Climb to 3000 direct
KOSHI and hold.

AWOS-3PT 133.525	BOSTON APP CON 134.75 254.25	CLNC DEL 119.85	UNICOM 123.0 (CTAF) L
----------------------------	--	---------------------------	---------------------------------

MISSED APCH FIX

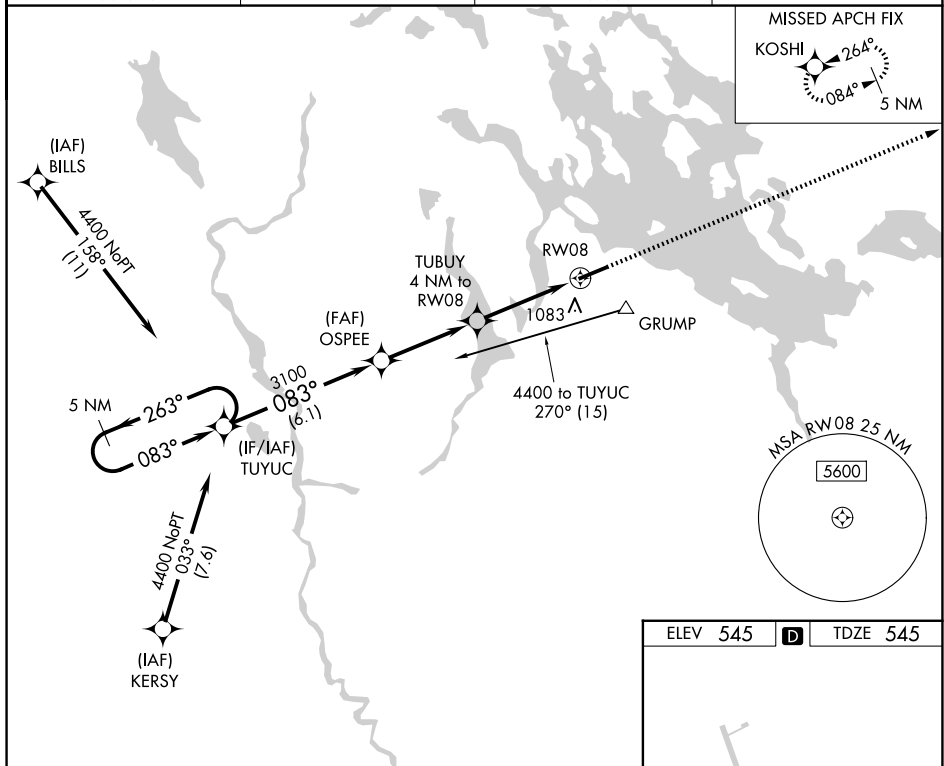

ELEV 545		TDZE 545
----------	---	----------

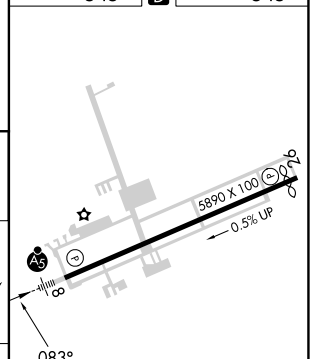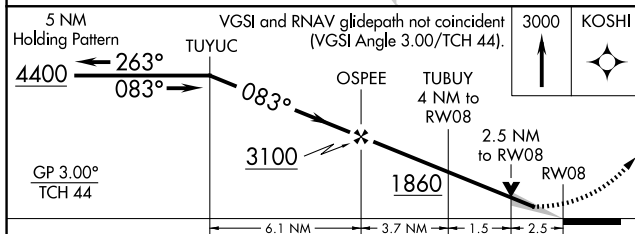

CATEGORY	A	B	C	D
LPV DA	978-3 ₄		433 (500-3 ₄)	
LNAV MDA	1380-3 ₄	835 (900-3 ₄)	1380-1 ₈	835 (900-1 ₈)
CIRCLING	1420-1 875 (900-1)	1600-1 ₂ 1055 (1100-1 ₂)	2160-3 1615 (1700-3)	2860-3 2315 (2400-3)