

APP CRS
342°

Rwy Idg
7000

TDZE
4252

Apt Elev
4252

RNAV (GPS) RWY 34
WORLAND MUNI (WRL)


▼

▲

When local altimeter setting not received, use Greybull altimeter setting: increase all MDAs 140 feet; and LNAV all Cats, and Circling Cat C/D visibilities ½ SM. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 8500 direct PEYIP and on track 290° to CRANY and hold.

ASOS 135.475	SALT LAKE CENTER 133.25 285.6	UNICOM 123.05 (CTAF) 0
-----------------	----------------------------------	---------------------------

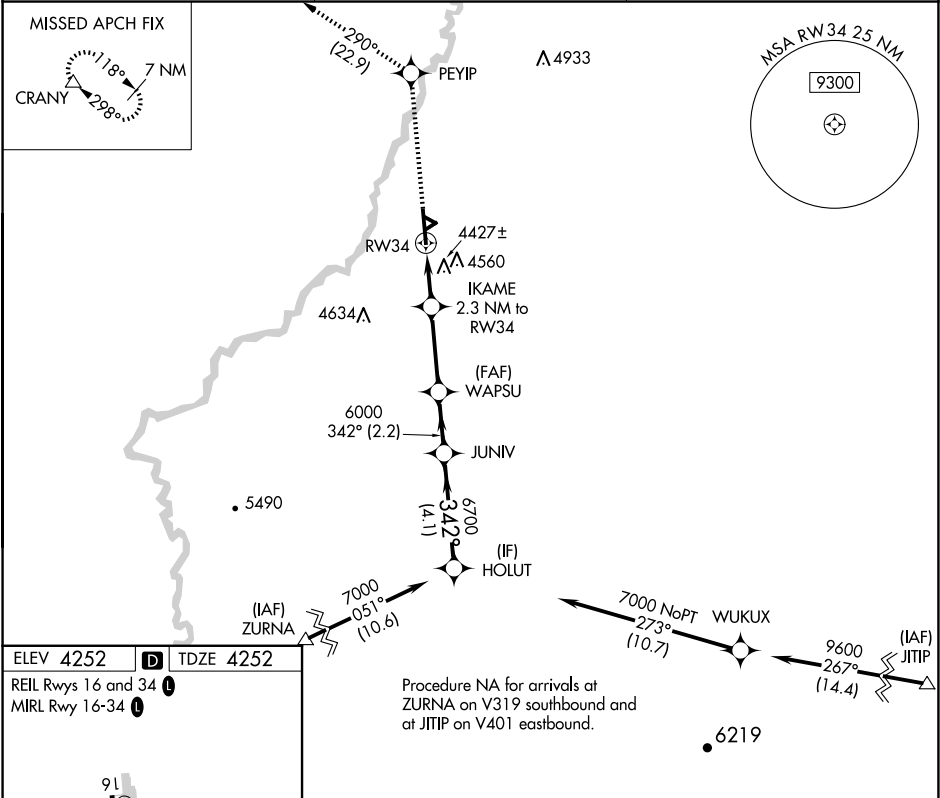

ELEV 4252

D

TDZE 4252

REIL Rws 16 and 34

MIRL Rwy 16-34

91

1.1% Up

4223

2502 X 60.8

0.6% Up

2241 X 60.2

7000 X 100

34

342° to RW34

8500

PEYIP

tr 290°

CRANY

IKAME

2.3 NM to RW34

WAPSU

JUNIV

HOLUT

5000

6000

6700

7000

2.3 NM

3.1 NM

2.2 NM

4.1 NM

CATEGORY	A	B	C	D
LNAV MDA	4680-1	428 (500-1)	4680-1¼	428 (500-1¼)
CIRCLING	4920-1	668 (700-1)	4920-1¾ 668 (700-1¾)	5020-2½ 768 (800-2½)

NW-1, 30 OCT 2025 to 27 NOV 2025

NW-1, 30 OCT 2025 to 27 NOV 2025