

WAAS CH 87007 W33A	APP CRS 326°	Rwy Ldg TDZE 2193 Apt Elev 2193
--	------------------------	---

RNAV (GPS) RWY 33


ONTARIO MUNI (ONO)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA when using Caldwell altimeter setting. When local altimeter setting not received, use Caldwell altimeter setting and increase all DA to 2541 feet and increase LPV and LNAV/VNAV visibility ¾ SM all Cats; increase all MDA 100 feet and increase LNAV Cat C and D ¾ SM and Circling Cat C visibility ¼ SM. Circling Rwy 15 NA at night. Rwy 33 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 9000 direct ZEMTI and on track 327° to HOVEL and hold, continue climb-in-hold 9000.

ASOS 135.275	SALT LAKE CENTER 128.05 306.95	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

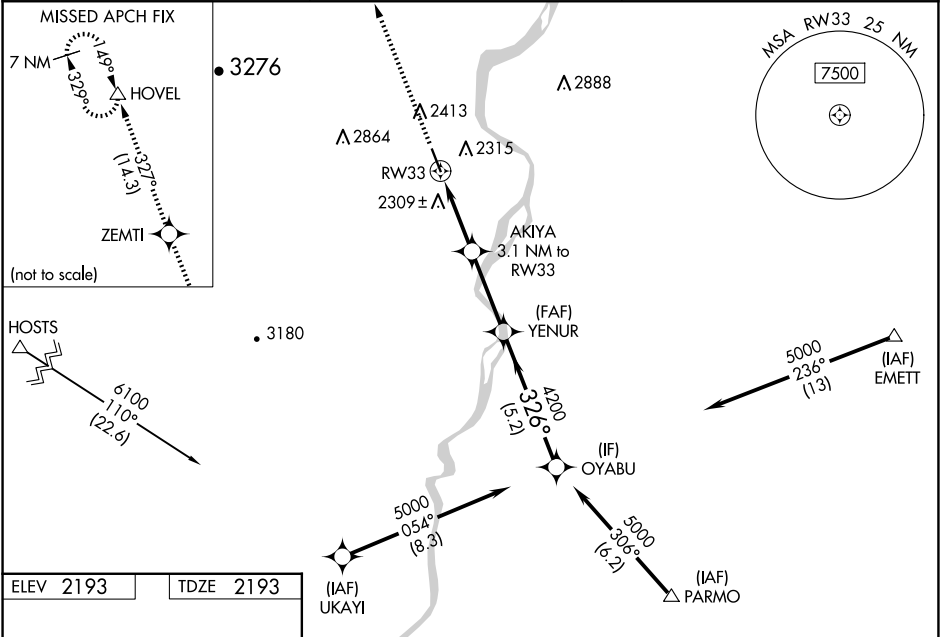

ELEV 2193	TDZE 2193	9000 ZEMTI tr 327° HOVEL			
91 5000 x 100 33 326° MIRL Rwy 15-33 REIL Rws 15 and 33		*LNAV only AKIYA 3.1 NM to RW33 1 NM to RW33 RW33 YENUR 4200 326° 5000 OYABU GP 3.00° TCH 40			
		1 NM 2.1 NM 3.1 NM 5.2 NM			
CATEGORY		A			
LPV DA		2443-7⁄8 250 (300-7⁄8)			
LNAV/VNAV DA		2443-7⁄8 250 (300-7⁄8)			
LNAV MDA		2560-1 367 (400-1)			
CIRCLING		2760-1 567 (600-1)	2800-1 607 (700-1)	3120-2¾ 927 (1000-2¾)	3240-3 1047 (1100-3)