

WAAS CH 63001 W35A	APP CRS 355°	Rwy Ldg TDZE 532 Apt Elev 548
--	------------------------	---

RNAV (GPS) RWY 35

COX FLD (PRX)

RNP APCH - GPS.


▼

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Baro-VNAV and VDP NA when using SLR altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use SLR altimeter setting and increase LPV DA to 859 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1002 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2200 direct
PUYOS and hold.

AWOS-3PT 119.675	FORT WORTH CENTER 124.875 370.95	UNICOM 122.975 (CTAF) 0
----------------------------	--	--

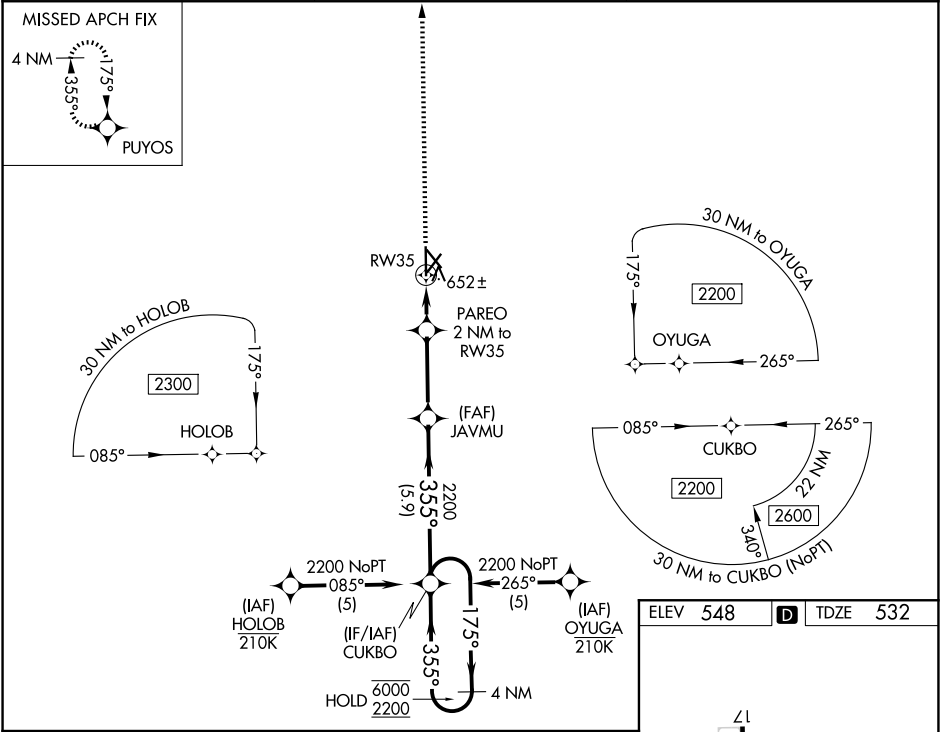

2200	PUYOS	JAVMU	CUKBO	4 NM Holding Pattern
↑	⬠	2200	2200	6000
1.1 NM to RW35	1.1 NM to RW35	3.1 NM	5.9 NM	GP 3.00° TCH 40
1200	2200	2200	2200	
1.1 NM	0.9	3.1 NM	5.9 NM	
CATEGORY	A	B	C	D
LPV DA		782-¾	250 (300-¾)	
LNAV/VNAV DA		925-1⅛	393 (400-1⅛)	
LNAV MDA	920-1	388 (400-1)	920-1⅛	388 (400-1⅛)
CIRCLING	1060-1	512 (600-1)	1100-1½ 552 (600-1½)	1220-2¼ 672 (700-2¼)

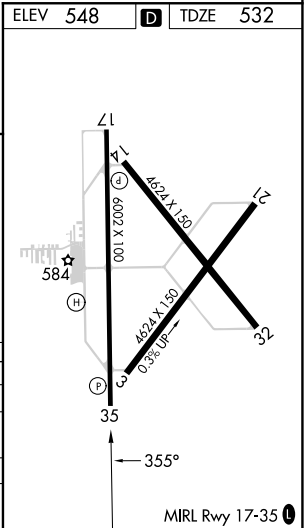

SC-2, 30 OCT 2025 to 27 NOV 2025

SC-2, 30 OCT 2025 to 27 NOV 2025