

LOC I-GGG <u>109.5</u>	APP CRS 131°	Rwy Ldg TDZE Apt Elev	9200 358 366
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 13
EAST TEXAS RGNL (GGG)

DME required.


V VDP NA when using JXI altimeter setting. For inop ALS, increase S-HLS 13 Cat E visibility to RVR 4000, S-LOC 13 Cat C/D/E visibility to 1 3/4 SM. When local altimeter setting not received, use JXI altimeter setting and increase S-HLS 13 DA to 617 feet; increase all MDAs 60 feet, and S-LOC 13 visibility Cat C/D to RVR 6000 and Circling visibility Cat C/D/E 1/2 SM. *RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using JXI altimeter setting).

MALSR




MISSED APPROACH: Climb to 3000 on GGG VORTAC R-126 to ARGEN INT/GGG 14 DME and hold, continue climb-in-hold to 3000.

ATIS 119.65	LONGVIEW APP CON★ 124.675 257.975	EASTEX TOWER ★ 119.2 (CTAF) 0377.05	GND CON 121.6	UNICOM 122.95
----------------	--------------------------------------	--	------------------	------------------

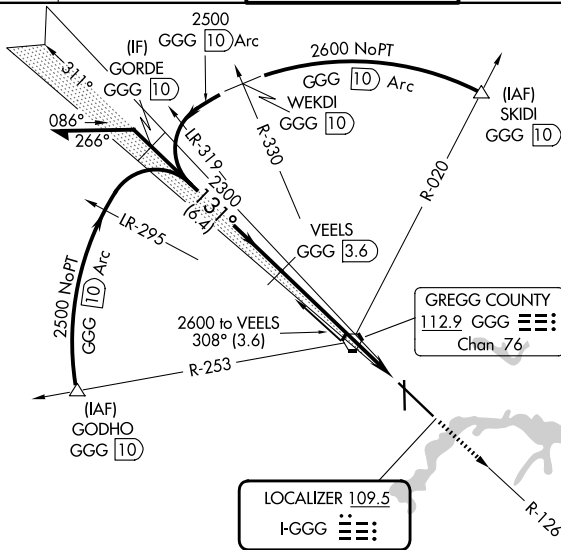


ELEV 366	D	TDZE 358
----------	----------	----------



HIRL Rwy 13-31 **L**
MIRL Rwy 18-36

FAF to MAP 6 NM

Knots	60	90	120	150	180
Min:Sec	6:00	4:00	3:00	2:24	2:00

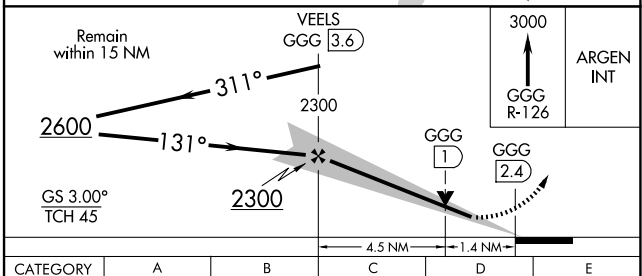

CATEGORY	A	B	C	D	E
S-ILS 13 *	558/24 200 (200-½)				
S-LOC 13	860/24 502 (500-½)		860/55 502 (500-1)		860/60 502 (500-1¼)
CIRCLING	860-1 494 (500-1)		980-1¾ 614 (700-1¾)	1080-2¼ 714 (800-2¼)	1080-2½ 714 (800-2½)