

WAAS CH 77712 W18A	APP CRS 182°	Rwy Ldg 7150 TDZE 344 Apt Elev 346
--	------------------------	---


RNAV (GPS) RWY 18
TUPELO RGNL (TUP)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). When local altimeter not received, use Columbus AFB altimeter setting and increase all DA 112 feet and all MDA 120 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ½ mile and LNAV Cats C and D ½ mile and Circling Cats C and D ½ mile. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
GAGYE and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 0 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

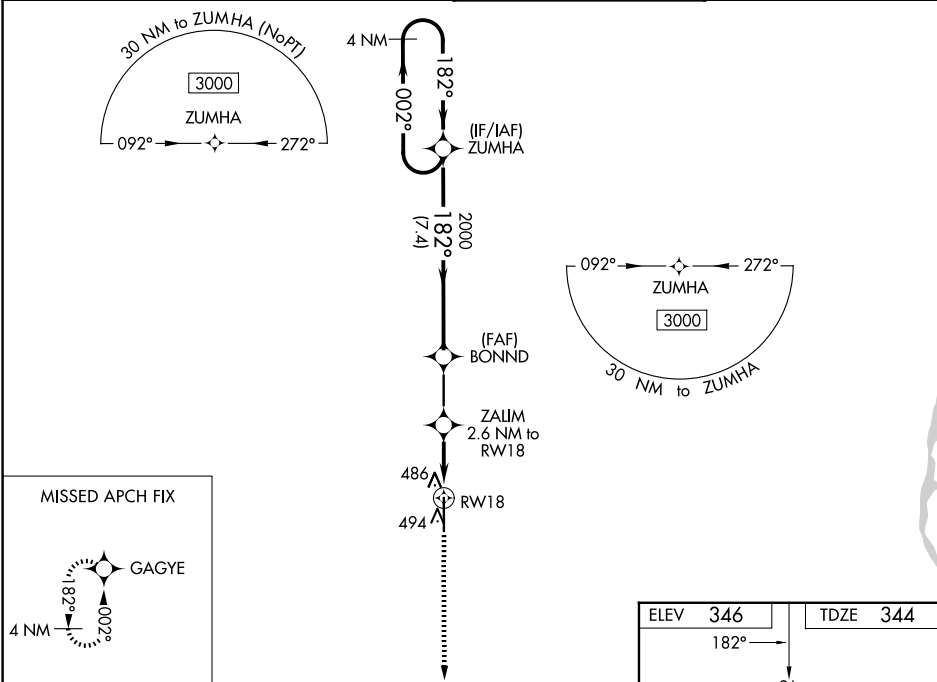

3000	GAGYE				
*LNAV only.	*1.1 NM to RW18	ZAIM 2.6 NM to RW18	BONND 2000	ZUMHA 4 NM Holding Pattern	002° → 3000
RW18		*1200	182°	182°	GP 3.00° TCH 45
1.1 NM		1.5 NM	2.5 NM	7.4 NM	
CATEGORY	A	B	C	D	
LPV DA	544-¾ 200 (200-¾)				
LNAV/VNAV DA	659-1 315 (400-1)				
LNAV MDA	740-1 396 (400-1)		740-1⅛ 396 (400-1⅛)		
CIRCLING	820-1 474 (500-1)		900-1½ 554 (600-1½) 1140-2½ 794 (800-2½)		

