

WAAS CH 93712 W36A	APP CRS 002°	Rwy Ldg TDZE 346 Apt Elev 346
--	------------------------	---

RNAV (GPS) RWY 36

TUPELO RGNL (TUP)


RNP APCH:

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C (16°F) or above 54°C (130°F). When local altimeter setting not received, use Columbus AFB altimeter setting and increase all DA 112 feet and all MDA 120 feet; increase LNAV/VNAV all Cats visibility ½ mile and LNAV Cats C and D ¾ mile and Circling Cats C and D ½ mile. For inop ALS when using Columbus AFB altimeter setting, increase LPV all Cats visibility ½ SM. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.



MISSED APPROACH:
Climb to 3000 direct ZUMHA and hold.

ASOS 133.525	MEMPHIS CENTER 128.5 279.55	TUPELO TOWER ★ 118.775 (CTAF) 0 254.275	GND CON 121.825 254.275
------------------------	---------------------------------------	---	-----------------------------------

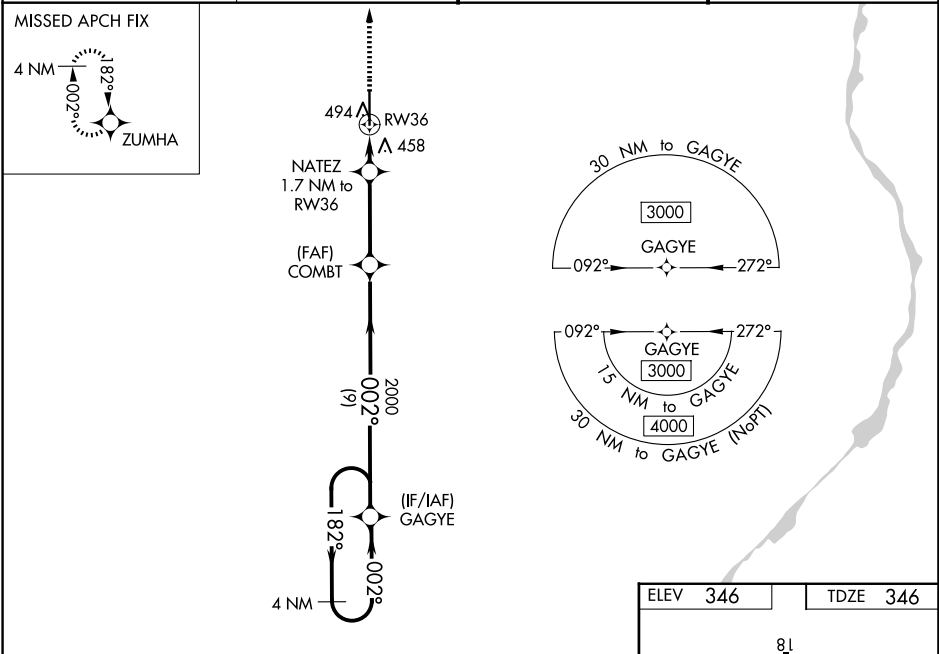

3000 ↑ ZUMHA		*LNAV only.		COMBT		GAGYE		4 NM Holding Pattern	
*1 NM to RW36		NATEZ 1.7 NM to 2000		RW36		182° → 3000		← 002°	
*920		2000		GP 3.00°		TCH 55			
CATEGORY		A		B		C		D	
LPV DA		546-½		200 (200-½)					
LNAV/VNAV DA		730-¾		384 (400-¾)					
LNAV MDA		720-½ 374 (400-½)		720-⅝ 374 (400-⅝)					
CIRCLING		820-1 474 (500-1)		900-1½ 554 (600-1½)		1140-2½ 794 (800-2½)			

