

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/ VNAV NA below -23°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct IGLAW and hold.

|                 |                                       |                                          |                  |                  |
|-----------------|---------------------------------------|------------------------------------------|------------------|------------------|
| ATIS<br>125.725 | GREAT LAKES APP CON★<br>127.3 335.575 | JACKSON TOWER★<br>128.475 (CTAF) 0 257.8 | GND CON<br>121.9 | UNICOM<br>122.95 |
|-----------------|---------------------------------------|------------------------------------------|------------------|------------------|

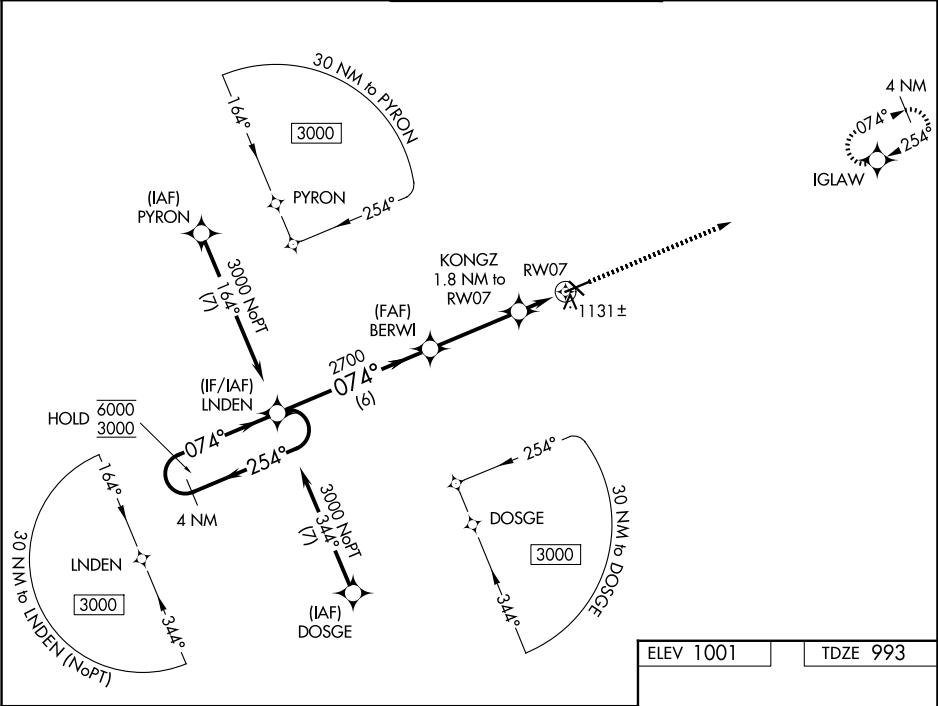

4 NM Holding Pattern LNDEN

GP 3.00° TCH 37

3000 IGLAW

BERWI 2700 KONGZ 1.8 NM to RWY 7 1.2 NM to RWY 7 RWY 7 1131

6 NM 3.5 NM 0.6 NM 1.2 NM

| CATEGORY      | A                      | B                          | C                  | D |
|---------------|------------------------|----------------------------|--------------------|---|
| LPV DA        | 1258-7/8 265 (300-7/8) |                            |                    |   |
| LNAV/ VNAV DA | 1292-7/8 299 (300-7/8) |                            |                    |   |
| LNAV MDA      | 1400-1 407 (400-1)     | 1400-1 1/8 407 (400-1 1/8) |                    |   |
| CIRCLING      | 1480-1 479 (500-1)     | 1660-1 3/4 659 (700-1 3/4) | 1660-2 659 (700-2) |   |

ELEV 1001 TDZE 993

4000 X 100 5351 X 100 TWR 1063 32 52

074°

HIRL Rwy 7-25 0  
MIRL Rwy 14-32 0  
REIL Rwys 7 and 32 0