

LOM UI	APP CRS	Rwy Idg	7098
293	038°	TDZE	763
		Apt Elev	768

NDB RWY 4

QUINCY RGNL-BALDWIN FLD (UIN)

⚠


NA

For inop ALS, increase S-04 Cat A and B visibility to 1 SM and Cat C and D visibility to 1 ½ SM. When local altimeter setting not received, use Pittsfield altimeter setting and increase all MDAs 80 feet and S-04 visibility Cat C/D ¼ SM. For inop ALS when local altimeter setting not received increase S-04 Cat A/B visibility to 1 SM and Cat C/D visibility to 1 ¾ SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 2300 direct UI LOM and hold.

ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 123.0 (CTAF) 0
-----------------	---------------------------------------	--------------------------

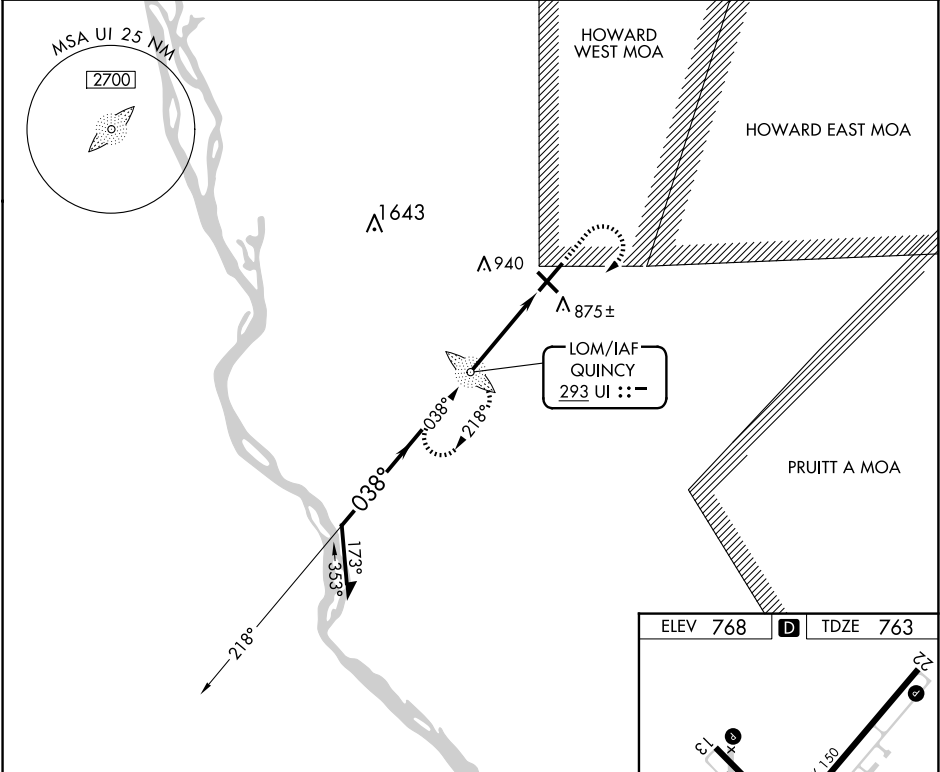

Remain within 10 NM

2300

218°

038°

2100

3.17°

TCH 39

3.9 NM

1800

2300

UI

UI LOM

2500

CATEGORY	A	B	C	D
S-4	1180-3/4	417 (500-3/4)		
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1½ 472 (500-1½)	1320-2 552 (600-2)

ELEV 768

TDZE 763

HIRL Rwy 4-22

MIRL Rwy 13-31

REIL Rwy 22

FAF to MAP 3.9 NM

Knots	60	90	120	150	180
Min:Sec	3:54	2:36	1:57	1:34	1:18