
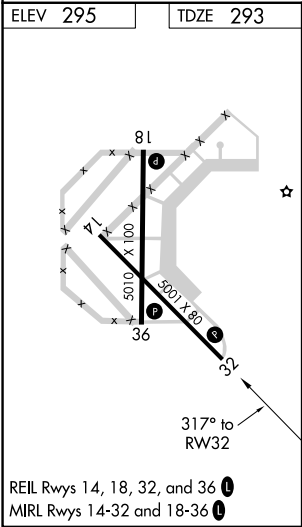


WAAS CH 40410 W32A	APP CRS 317°	Rwy Idg TDZE Apt Elev	5001 293 295
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 32

MALDEN RGNL (MAW)

RNP APCH-GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. ▲ MISSED APPROACH: Climb to 2100 direct EPOPY and hold.			
AWOS-3PT 119.825	MEMPHIS CENTER 133.65 292.15	GCO 135.075	UNICOM 122.8 (CTAF) 0

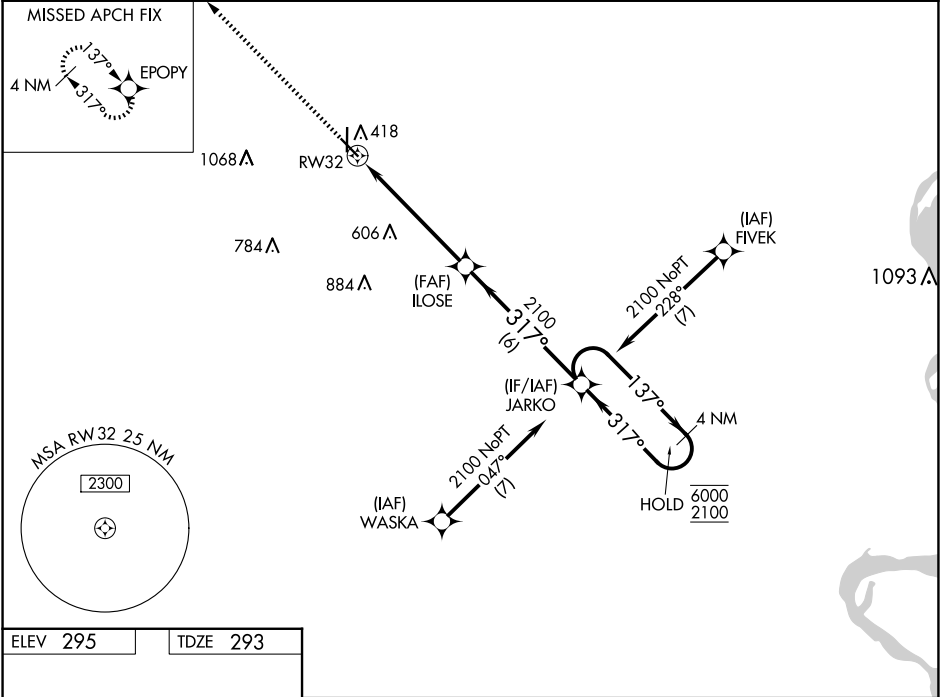

2100 EPOPY		ILOSE 2100		JARKO 2100		4 NM Holding Pattern	
1.3 NM to RW32		1.3		4.3 NM		6 NM	
RW32		1.3		4.3 NM		6 NM	
CATEGORY		A		B		C	
LPV DA		543-1		250 (300-1)		NA	
LNAV/VNAV DA		543-1		250 (300-1)		NA	
LNAV MDA		740-1		447 (500-1)		740-1 3/8 447 (500-1 3/8)	
CIRCLING		740-1 445 (500-1)		800-1 505 (600-1)		800-1 1/2 505 (600-1 1/2)	