

LOC/DME I-GAD
108.35
Chan **20**(Y)

APP CRS
244°

Rwy Ldg **6802**
TDZE **560**
Apt Elev **569**


ILS or LOC RWY 24

NORTHEAST ALABAMA RGNL (GAD)

▼ DME required. VDP NA when using Annonisn altimeter setting. When local altimeter setting not received, use Annonisn altimeter setting and increase DA to 845 feet and all visibilities ¼ SM: increase all MDAs 80 feet and visibility S-LOC Cats C and D ¼ SM and Circling Cat C ½ SM.

▲ MISSED APPROACH: Climb to 3600 on GAD VOR/DME R-231 to STAMP/GAD 10 DME and hold, continue climb-in-hold to 3600.

AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0
----------------------------	--	---------------------------------	--

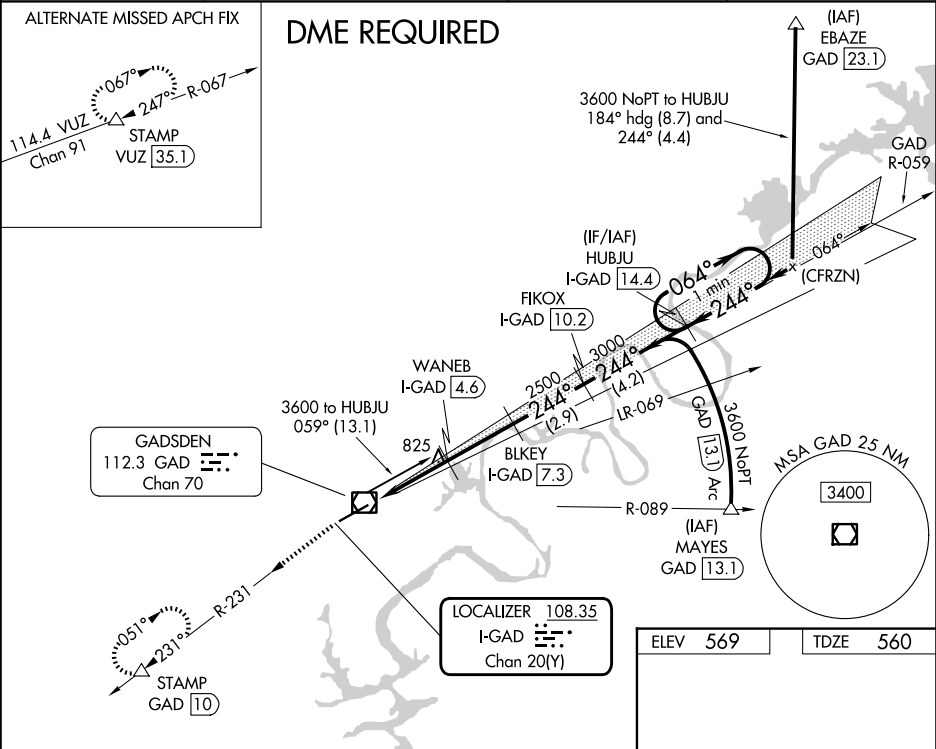

3600	GAD	STAMP	Use I-GAD DME when on the localizer course.	HUBJU
↑	R-231	△		I-GAD 14.4
*LOC only.				FIKOX I-GAD 10.2
				BLKEY I-GAD 7.3
				WANE I-GAD 4.6
				I-GAD 1.3
				1620*
				2500
				3000
				244°
				064°
				3600
				One Minute Holding Pattern
				GS 3.00° TCH 43
				1.7 NM 1.6 NM 2.7 NM 2.9 NM 4.2 NM
CATEGORY	A	B	C	D
S-ILS 24		779-¾	219 (300-¾)	
S-LOC 24	1140-1	580 (600-1)	1140-1¾	580 (600-1¾)
CIRCLING	1140-1	571 (600-1)	1440-2½	1680-3
			871 (900-2½)	1111 (1200-3)

ELEV 569

TDZE 560

6802 X 150

0.35% UP

244°

6802 X 150

0.35% UP

244°

HIRL Rwy 6-24 **0**

REIL Rwy 6 and 24 **0**