

WAAS CH 65905 W24A	APP CRS 244°	Rwy Ldg 6802 TDZE 560 Apt Elev 569
--	------------------------	---


RNAV (GPS) RWY 24
NORTHEAST ALABAMA RGNL (GAD)

RNP APCH-GPS.


- ▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C .
▲ When local altimeter setting is not received, use Anniston altimeter setting and increase LPV DA to 847 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1082 feet and all visibilities ½ SM; increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ½ SM. Baro-VNAV and VDP NA when using Anniston altimeter setting.

MISSED APPROACH: Climb to 3600 direct CEGON and on track 221° to STAMP and hold, continue climb-in-hold to 3600.

AWOS-3PT 127.825	BIRMINGHAM APP CON 125.45 279.65	CLNC DEL 120.05 257.7	UNICOM 122.725 (CTAF) 0
----------------------------	--	---------------------------------	--

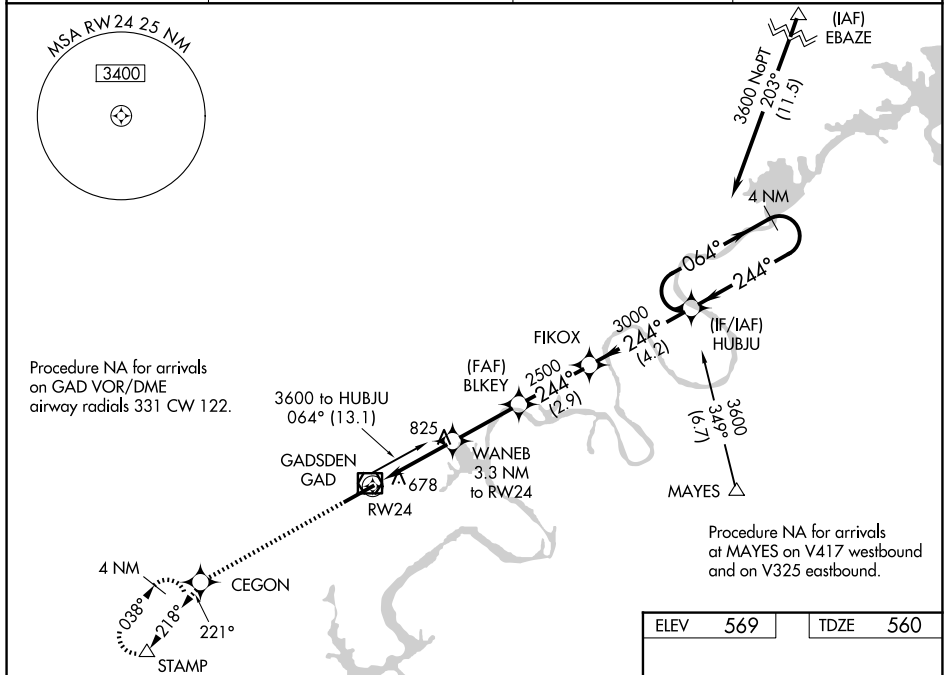

ELEV	569		TDZE	560
------	-----	--	------	-----

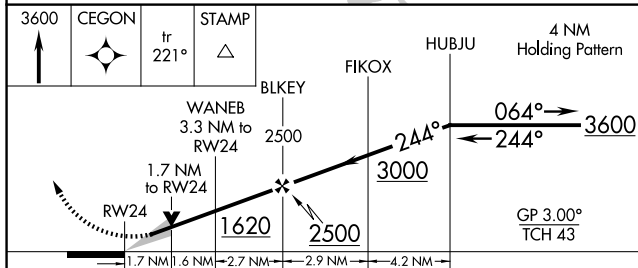

CATEGORY	A	B	C	D
LPV DA	781-3 $\frac{3}{4}$		221 (300-3 $\frac{3}{4}$)	
LNAV/ VNAV DA	1016-13 $\frac{8}{8}$		456 (500-13 $\frac{8}{8}$)	
LNAV MDA	1140-1	580 (600-1)	1140-1 $\frac{5}{8}$	580 (600-1 $\frac{5}{8}$)
CIRCLING	1140-1	571 (600-1)	1440-2 $\frac{1}{2}$ 871 (900-2 $\frac{1}{2}$)	1680-3 1111 (1200-3)

