

LOC I-PBF <u>111.7</u>	APP CRS 178°	Rwy Idg 5998 TDZE 206 Apt Elev 206
----------------------------------	------------------------	---

ILS or LOC RWY 18
PINEBLUFF RGNL/GRIDER FLD(PBF)

DME required.


NA Rwy 18 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Inop table does not apply to S-LSL 18. For inop ALS, increase S-LOC 18 all Cats visibility to 1 SM. For inop ALS when using Stuttgart altimeter setting, increase S-LOC 18 Cat A/B visibility to 1 SM. DME from PBF VOR/DME. DME requires simultaneous reception of I-PBF and PBF DME. When local altimeter setting not received, use Stuttgart altimeter setting; increase DA to 541 feet and all MDA 80 feet; increase S-LOC 18 Cat C/D visibility $\frac{1}{2}$ SM and Circling Cats C/D visibility $\frac{1}{4}$ SM. Autopilot-coupled approach NA below 900.

MALSR



MISSED APPROACH:
Climb to 1000 then
climbing right turn to
2000 on PBF VOR/DME
R-211 to RISON/
PBF 15 DME and hold.

ASOS 120.775	LITTLE ROCK APP CON 119.85 353.6	CLNC DEL 119.85	UNICOM 123.0 (CTAF) L
------------------------	--	---------------------------	---------------------------------

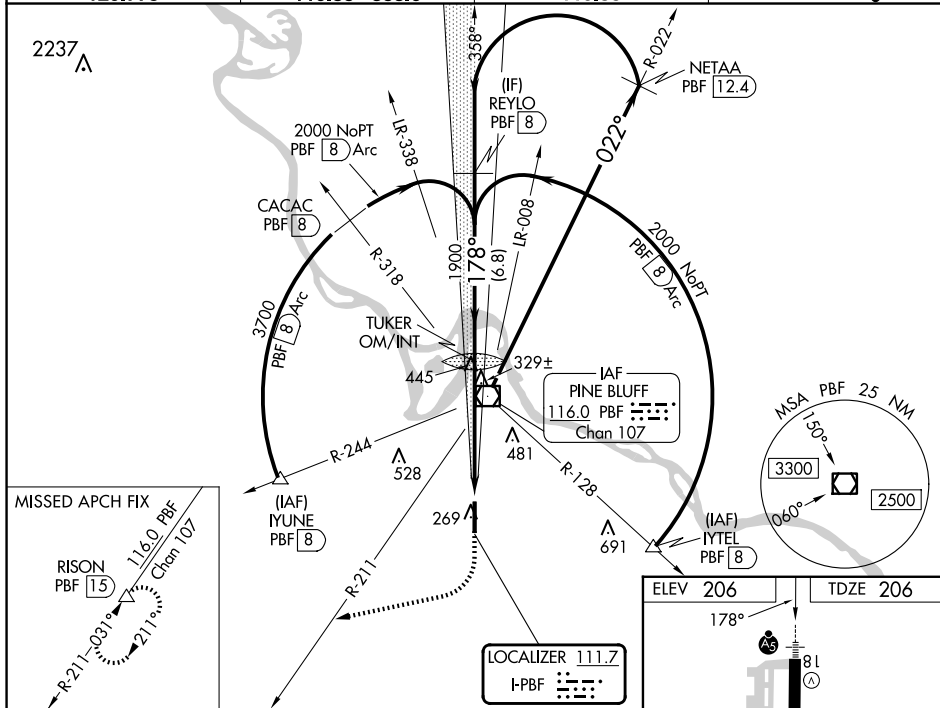

CATEGORY	A	B	C	D
S-ILS 18		466- ³ / ₄	260 (300- ³ / ₄)	
S-LOC 18		580- ³ / ₄	374 (400- ³ / ₄)	
C CIRCLING	660-1 454 (500-1)	680-1 474 (500-1)	840-1 ³ / ₄ 634 (700-1 ³ / ₄)	880-2 ¹ / ₄ 674 (700-2 ¹ / ₄)

