


RNAV (GPS) RWY 5

WAAS Chan 90095 W05A		APCH CRS 047°	Rwy ldg 12,202 TDZE 37 Arpt Elev 37	[UN]	BEAUFORT MCAS (MERRITT FLD) (KNBC)		
RNP APCH				SALSF A2	MISSED APPROACH: Climb to 3000 direct HOWEL and hold, continue climb-in-hold to 3000.		
RADAR required							
▼ * When ALS inop, increase vis to 1 mile. ** When ALS inop, increase CAT AB vis to 1 mile, CAT CD to 1½ miles.							
ATIS ★ 279.525	APP CON 125.125 292.125 (ABV 3000) 123.7 269.125 (3000 and BLW)			TOWER★ 119.05 342.875	GND CON 128.15 348.625	CLNC DEL 128.15 254.375	ASR/ PAR

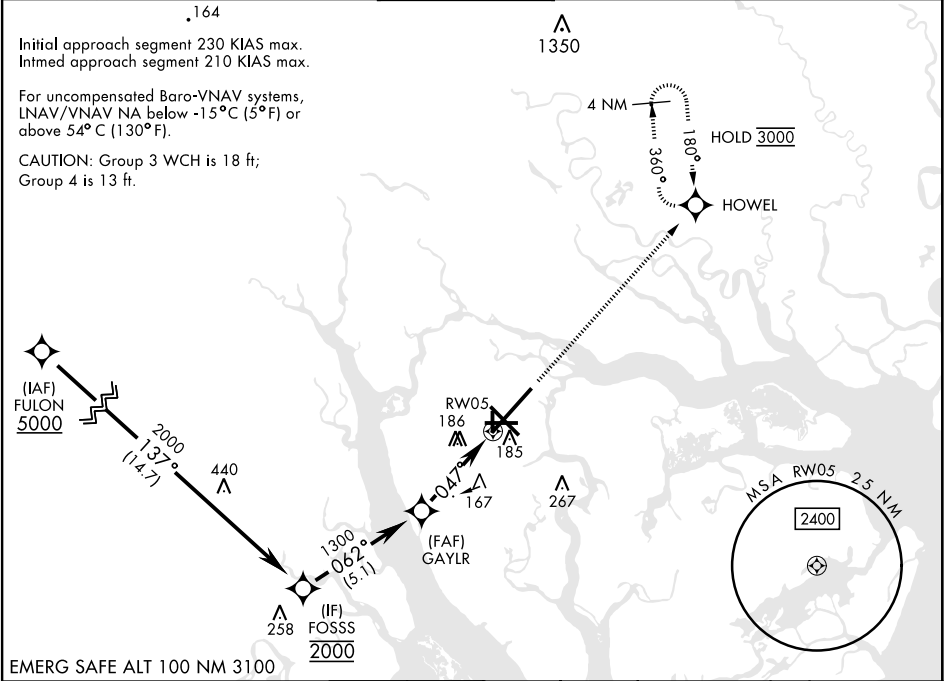

FULON 5000		FOSSS 2000	GAYLR 1300	RW05 3000	HOWEL 	ELEV 37 HRL Rwy 5-23 and 14-32	TDZE 37
GP 3.00° TCH 38		137°	062°	047°	1.1 NM to RW05		
CATEGORY		A	B	C	D		
LPV DA		237-¾		200	(200-¾)		
LNAV/ * VNAV DA		409-¾		372	(400-¾)		
LNAV MDA		420-¾	383 (400-¾)	420-7/8	383 (400-7/8)		
		560-1	523 (600-1)	580-1½ 543 (600-1½)	600-2 563 (600-2)		

RNAV (GPS) RWY 5

SE-2, 30 OCT 2025 to 27 NOV 2025

SE-2, 30 OCT 2025 to 27 NOV 2025