

WAAS CH 78409 W09A	APP CRS 095°	Rwy Ldg 10002 TDZE 55 Apt Elev 55
--	------------------------	--

RNAV (GPS) RWY 9L
ORLANDO SANFORD INTL (SFB)

RNP APCH.


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Baro-VNAV and VDP NA when using Orlando Exec altimeter setting. When local altimeter setting not received, use Orlando Exec altimeter setting and increase LPV DA to 282, LNAV/VNAV DA to 501 and all MDA 60 feet; increase LNAV/VNAV all Cats visibilities ½ SM and LNAV Cat C/D visibility ¼ SM. Night landing: Rwy 27C NA.

MALSR




MISSED APPROACH: Climb to 1600 direct UXFIM and hold.

ATIS 125.975	ORLANDO APP CON 135.3 351.9 (N) 119.775 351.9 (S)	SANFORD TOWER★ 120.3(CTAF) 0 254.35	GND CON 121.35 254.35	CLNC DEL 123.975	CLNC DEL 121.35 (When twr closed)
-----------------	---	--	--------------------------	---------------------	---

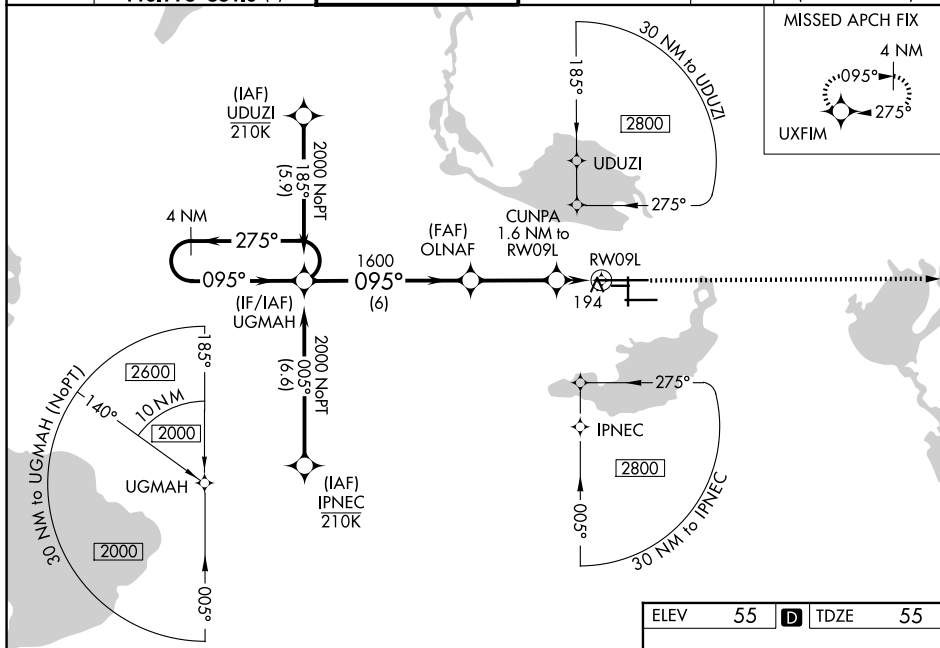

ELEV	55	D	TDZE	55
------	----	----------	------	----

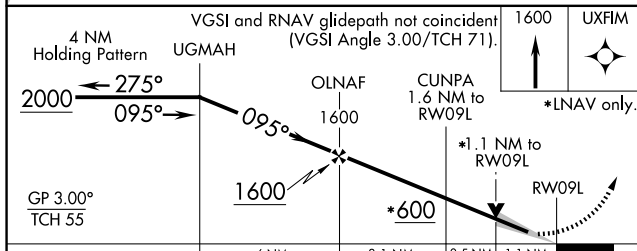

CATEGORY		A		B		C		D	
LPV	DA	255-½		200 (200-½)					
RNAV/ VNAV	DA	355-½		300 (300-½)					
RNAV	MDA	460-½ 405 (500-½)		460-¾ 405 (500-¾)					
CIRCLING		580-1 525 (600-1)		600-1½ 545 (600-1½)		640-2 585 (600-2)			

