

VORTAC DBQ	APP CRS	Rwy Ldg
115.8	304°	6502
Chan 105		TDZE 1062
		Apt Elev 1077

VOR RWY 31
DUBUQUE RGNL (DBQ)


V

VOR minimums: For inop ALS, increase S-31 Cats C and D visibility to 2 SM.
ZUKOB fix minimums: For inop ALS, increase S-31 Cats C and D visibility to 1½ SM.


MALSR

MISSED APPROACH: Climbing right turn to 3500 on DBQ VORTAC R-322 to CASSY INT/ 25 DME and hold.

ATIS 127.25	CHICAGO CENTER 133.95 281.4	DUBUQUE TOWER ★ 119.5 (CTAF) 0 254.4	GND CON 121.8	UNICOM 122.95
-----------------------	---------------------------------------	--	-------------------------	-------------------------

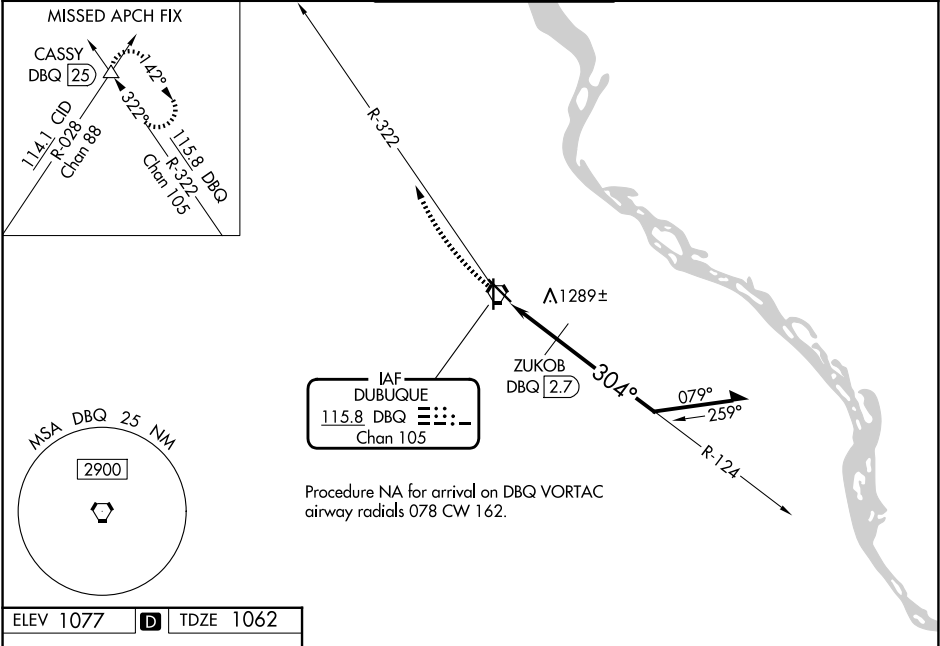

ELEV 1077	D	TDZE 1062
-----------	----------	-----------

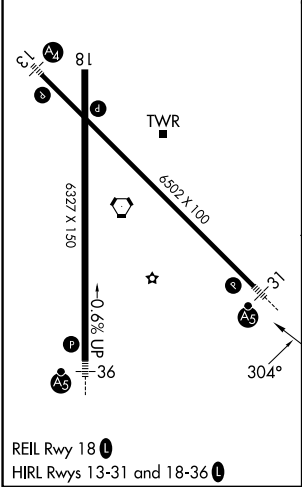

3500 DBQ R-322	CASSY △					
CATEGORY	A	B	C	D		
S-31	1820-½ 758 (800-½)	1820-¾ 758 (800-¾)	1820-1¾ 743 (800-1¾)	758 (800-1¾)		
CIRCLING	1820-1 743 (800-1)	1820-1¼ 743 (800-1¼)	1820-2¼ 743 (800-2¼)	1820-2½ 743 (800-2½)		
ZUKOB FIX MINIMUMS						
S-31	1540-½ 478 (500-½)	1540-1 478 (500-1)				
CIRCLING	1580-1 503 (600-1)	1600-1 523 (600-1)	1600-1½ 523 (600-1½)	1800-2 723 (800-2)		